

## Hebron Series Wall Bracket



Model Number	Lamping Code	Body Lamping	Circuit	Finish	Diffuser	Mounting	Louver	Options
<b>HB0816B</b> • W 8 • HT 16 • EXT 10	DED	2,100lm LED (16W)	1	PC	AD AG	WM	CR SQ	BL D1 LOGO SIL
	ACK	1-100W A21 (100W)	1	PC	AD AG	WM	CR SQ	SIL LOGO BL
<b>HB1020B</b> • W 10 • HT 20 • EXT 12	DEE	3,100lm LED (22W)	1	PC	AD AG	WM	CR SQ	BL D1 LOGO SIL
	ACM	1-100W A21 (100W)	1	PC	AD AG	WM	CR SQ	SIL LOGO BL
<b>HB1224B</b> • W 12 • HT 24 • EXT 14	FEJ	4,400lm LED (33W)	1	PC	AD AG	WM	CR SQ	BL D1 LOGO SIL
	FEI	1-100W A21 (100W)	1	PC	AD AG	WM	CR SQ	SIL LOGO BL
<b>HB1426B</b> • W 14 • HT 26 • EXT 16	DEG	6,300lm LED (47W)	1	PC	AD AG	WM	CR SQ	BL D1 LOGO SIL
	ACR	2-100W A21 (200W)	1	PC	AD AG	WM	CR SQ	SIL LOGO BL

### SAMPLE CATALOG NUMBER

**Model Number - Lamping Code - Finish - Mounting - Diffuser - Options**

Scale


Abbreviation Key

#### Lamps

100W A21      Medium Base, 100W Max, Incandesent or LED

#### Finish Types

PC      Powder Coat

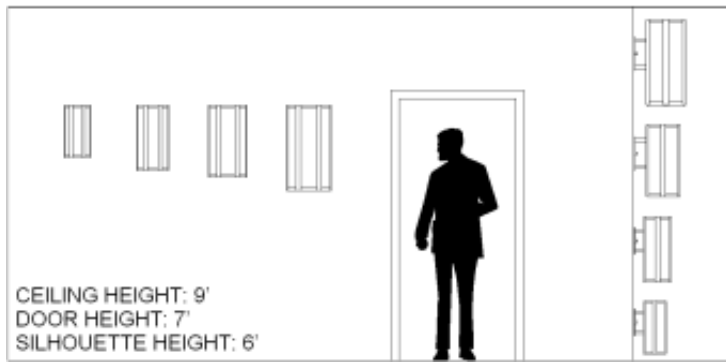

## PRODUCT FEATURES

- Fabricated and welded metal housing
- Powder coated metallic finish
- UV stable, white acrylic diffuser (Standard)
- Optional specialty diffuser materials available
- Energy efficient LED or fluorescent lamping
- Wired for single circuit operation (Body Lamping)
- High power factor electronic ballast or LED driver
- Standard LED color temperature is 3000K with 80 CRI. Contact us for other color temperature or CRI options.
- Incandescent lamping is Triac or ELV dimmable - consult lamp and dimmer manufacturer for compatability.
- Optional dimming ballast 120V or 277V (LED or fluorescent lamping)
- Mounts to standard electrical junction box (by others)
- LED Battery Back-Up Available
- UL / cUL or ETL / cETL listed
- Contact Us for more lamping options.

## Diffuser Types

AD	Standard Acrylic Diffuser
AG	Premium Glass Diffuser

## Mountings

WM	Wall Mount
----	------------

## Louvers

CR	Concentric Ring
SQ	Square Cell

## Dimming

D1	LED 0-10v dimming options include integral 120-277v dimming drivers
----	---------------------------------------------------------------------

## Options

SIL	Silhouette Symbol
LOGO	Custom Logo
BL	Bottom Lens