

# **Hancock Series 3-Tier Large Pendant**





Model Number	Lamping Code	Body Lamping	Gallery Lamping	Down Lamping	Circuit	Finish	Diffuser	Mounting	Louver	Options
• W 30 • HT 40 • OAH 72 (OverAll Height)	GLH	4-60W A19 (240W)	6-60W A19 (360W)	1-100W R40/Par38 (100W)	2	PC	WA AG	ST CH SP	SQ	SIL LOGO
• W 36 • HT 44 • OAH 96 (OverAll Height)	DWH	15,300lm LED (87W)	32,600lm LED (216W)	7,100lm LED (51W)	2	PC	WA AG	ST CH SP	SQ	SIL LOGO
	DJH	6-100W A21 (600W)	6-100W A21 (600W)	1-100W R40/Par38 (100W)	3	PC	WA AG	ST CH SP	SQ	SIL LOGO
• W 42 • HT 50 • OAH 120 (OverAll Height)	DWK	15,300lm LED (87W)	32,600lm LED (216W)	12,500lm LED (93W)	2	PC	WA AG	ST CH SP	SQ	SIL LOGO
	FWL	6-100W A21 (600W)	12-100W A21 (1200W)	1-100W R40/Par38 (100W)	3	PC	WA AG	ST CH SP	SQ	SIL LOGO
HC5460H  • W 54"	DWL	28,100lm LED (152W)	37,600lm LED (260W)	12,500lm LED (93W)	2	PC	WA AG	ST CH SP	SQ	SIL LOGO
• HT 60" • OAH 120" (OverAll Height)	ELK	6-100W A21 (600W)	12-100W A21 (1200W)	1-100W R40/Par38 (100W)	3	PC	WA AG	ST CH SP	SQ	SIL LOGO

# SAMPLE CATALOG NUMBER

Model Number - Lamping Code - Finish - Mounting - Diffuser - Options

Scale


Abbreviation Key

Lamps

60W A19

Medium Base, 60W Max, Incandesent or LED Medium Base, 100W Max, Incandesent or LED

100W R40/Par38

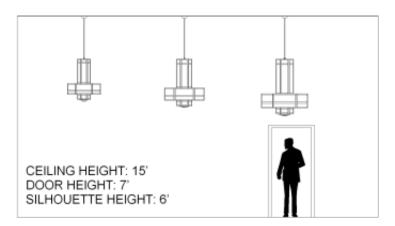

### PRODUCT FEATURES

- Fabricated and welded metal housing
- · Powder coated metallic finish
- UV stable, white acrylic diffuser (Standard)
- · Optional specialty diffuser materials available
- Energy efficient LED or fluorescent lamping
- Wired for three circuit operation (Body Lamping/Gallery Lamping/Down Lamping)
- High power factor electronic ballast or LED driver
- Standard LED color temperature is 3000K with 80 CRI. Contact us for other color temperature or CRI options.
- Incandescent lamping is Triac or ELV dimmable consult lamp and dimmer manufacturer for compatibility.
- Optional dimming ballast 120V or 277V (LED or fluorescent lamping)
- Fixture may be Chain or Stem hung (extra length may be added, specify OAH)
   (OAH Over All Height is the length from the ceiling to the bottom of the fixture.)
- Mounts to standard 4" octagonal electrical junction box (by others), Box requires additional structural support (by others)
- For slopes greater than 35 degrees (from horizontal) order steep pitch adapter (Stem only)
- UL / cUL or ETL / cETL listed
- Contact Us for more lamping options.

# Finish Types

PC Powder Coat

### **Diffuser Types**

WA Standard Acrylic Diffuser
AG Premium Glass Diffuser

#### Mountings

ST Stem
CH Chain

SP Steep Pitch Canopy for Stem

#### Louvers

SQ Square Cell

# **Dimming Types**

D1

### Options

SIL Silhouette Symbol LOGO Custom Logo