



Hancock Series 3-Tier Large Pendant

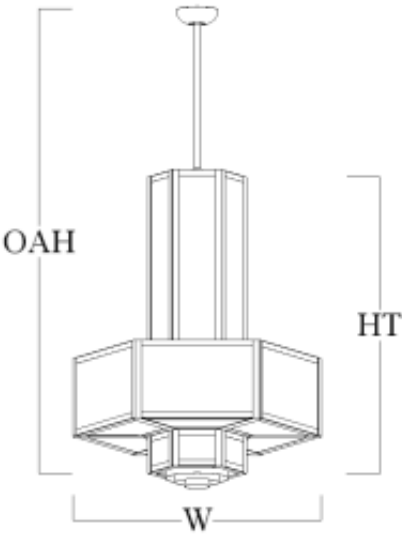

Model Number	Lamping Code	Body Lamping	Gallery Lamping	Down Lamping	Circuit	Finish	Diffuser	Mounting	Louver	Options
HC3038H - W 30 - HT 40 - OAH 72 (OverAll Height)	GLH	4-60W A19 (240W)	6-60W A19 (360W)	1-100W R40/Par38 (100W)	2	PC	WA AG	ST CH SP	SQ	SIL LOGO
HC3642H - W 36 - HT 44 - OAH 96 (OverAll Height)	DWH	15,300lm LED (87W)	32,600lm LED (216W)	7,100lm LED (51W)	2	PC	WA AG	ST CH SP	SQ	SIL LOGO
	DJH	6-100W A21 (600W)	6-100W A21 (600W)	1-100W R40/Par38 (100W)	3	PC	WA AG	ST CH SP	SQ	SIL LOGO
HC4249H - W 42 - HT 50 - OAH 120 (OverAll Height)	DWK	15,300lm LED (87W)	32,600lm LED (216W)	12,500lm LED (93W)	2	PC	WA AG	ST CH SP	SQ	SIL LOGO
	FWL	6-100W A21 (600W)	12-100W A21 (1200W)	1-100W R40/Par38 (100W)	3	PC	WA AG	ST CH SP	SQ	SIL LOGO
HC5460H - W 54" - HT 60" - OAH 120" (OverAll Height)	DWL	28,100lm LED (152W)	37,600lm LED (260W)	12,500lm LED (93W)	2	PC	WA AG	ST CH SP	SQ	SIL LOGO
	ELK	6-100W A21 (600W)	12-100W A21 (1200W)	1-100W R40/Par38 (100W)	3	PC	WA AG	ST CH SP	SQ	SIL LOGO

SAMPLE CATALOG NUMBER
Model Number - Lamping Code - Finish - Mounting - Diffuser - Options

Scale	Abbreviation Key
	Lamps
	60W A19 Medium Base, 60W Max, Incandesent or LED
	100W R40/Par38 Medium Base, 100W Max, Incandesent or LED

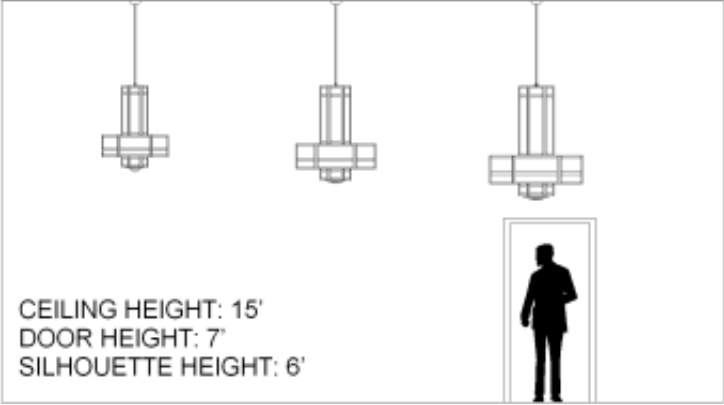

PRODUCT FEATURES

- Fabricated and welded metal housing
- Powder coated metallic finish
- UV stable, white acrylic diffuser (Standard)
- Optional specialty diffuser materials available
- Energy efficient LED or fluorescent lamping
- Wired for three circuit operation (Body Lamping/Gallery Lamping/Down Lamping)
- High power factor electronic ballast or LED driver
- Standard LED color temperature is 3000K with 80 CRI. Contact us for other color temperature or CRI options.
- Incandescent lamping is Triac or ELV dimmable - consult lamp and dimmer manufacturer for compatibility.
- Optional dimming ballast 120V or 277V (LED or fluorescent lamping)
- Fixture may be Chain or Stem hung (extra length may be added, specify OAH) (OAH - Over All Height - is the length from the ceiling to the bottom of the fixture.)
- Mounts to standard 4" octagonal electrical junction box (by others), Box requires additional structural support (by others)
- For slopes greater than 35 degrees (from horizontal) order steep pitch adapter (Stem only)
- UL / cUL or ETL / cETL listed
- Contact Us for more lamping options.

Finish Types	
PC	Powder Coat
Diffuser Types	
WA	Standard Acrylic Diffuser
AG	Premium Glass Diffuser
Mountings	
ST	Stem
CH	Chain
SP	Steep Pitch Canopy for Stem
Louvers	
SQ	Square Cell
Dimming Types	
0	D1
Options	
SIL	Silhouette Symbol
LOGO	Custom Logo