



Hancock Series Short Pendant





Model Number	Lamping Code	Body Lamping	Circuit	Finish	Diffuser	Mounting	Louver	Options
• W 12 • HT 9 • OAH 48 (OverAll Height)	AMQ	2-100W A21 (200W)	1	PC	WA AG	ST CH SM SP	SQ	SIL LOGO
• W 14 • HT 10 • OAH 48 (OverAll Height)	GGU	5,400lm LED (33W)	1	PC	WA AG	ST CH SM SP	SQ	SIL LOGO
	AMS	3-100W A21 (300W)	1	PC	WA AG	ST CH SM SP	SQ	SIL LOGO
• W 16 • HT 11 • OAH 48 (OverAll Height)	GFE	5,400lm LED (33W)	1	PC	WA AG	ST CH SM SP	SQ	SIL LOGO
	AMU	3-100W A21 (300W)	1	PC	WA AG	ST CH SM SP	SQ	SIL LOGO
• W 18 • HT 14 • OAH 48 (OverAll Height)	GFF	5,400lm LED (33W)	1	PC	WA AG	ST CH SM SP	SQ	SIL LOGO
	AMW	3-100W A21 (300W)	1	PC	WA AG	ST CH SM SP	SQ	SIL LOGO
• W 22 • HT 10 • OAH 48 (OverAll Height)	FXR	9,700lm LED (58W)	1	PC	WA AG	ST CH SM SP	SQ	SIL LOGO
	FYZ	15,800lm LED (116W)	1	PC	WA AG	ST CH SM SP	SQ	SIL LOGO

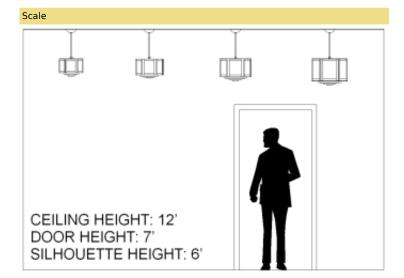

PRODUCT FEATURES

- Fabricated and welded metal housing
- Powder coated metallic finish
- UV stable, white acrylic diffuser (Standard)
- · Optional specialty diffuser materials available
- Energy efficient LED or fluorescent lamping
- Wired for single circuit operation (Body Lamping)
- High power factor electronic ballast or LED driver
- Standard LED color temperature is 3000K with 80 CRI. Contact us for other color temperature or CRI options.
- Incandescent lamping is Triac or ELV dimmable consult lamp and dimmer manufacturer for compatibility.
- Optional dimming ballast 120V or 277V (LED or fluorescent lamping)
- Fixture may be Chain or Stem hung (extra length may be added, specify OAH)
 (OAH Over All Height is the length from the ceiling to the bottom of the fixture.)
- Mounts to standard 4" octagonal electrical junction box (by others)
- For slopes greater than 35 degrees (from horizontal) order steep pitch adapter (Stem only)
- UL / cUL or ETL / cETL listed
- Contact Us for more lamping options.

Abbreviation Key

Lamps

100W A21 Medium Base, 100W Max, Incandesent or LED

Finish Types

PC Powder Coat

Diffuser Types

WA Standard Acrylic Diffuser
AG Premium Glass Diffuser

Mountings

ST Stem
CH Chain

SM Surface Mount Chain

SP Steep Pitch Canopy for Stem

Louvers

SQ Square Cell

Dimming Types

0 D1 1 D2

Options

SIL Silhouette Symbol LOGO Custom Logo