


Hammond Series Ceiling Mount





Model Number	Lamping Code	Body Lamping	Circui	t Finish	Diffuser	Mounting	Louver	Options
HD1207C • W 12" • HT 10"	AMY	2-100W A21 (200W)	1	PC	WA AG	СС	SQ	SIL LOGO
HD1408C • W 14" • HT 11"	ANA	3-100W A21 (300W)	1	PC	WA AG	СС	SQ	SIL LOGO
HD1609C	GFC	5,400lm LED (33W)	1	PC	WA AG	CC	SQ	SIL LOGO
• W 16" • HT 12"	ANC	3-100W A21 (300W)	1	PC	WA AG	CC	SQ	SIL LOGO
HD1811C	GFD	5,400lm LED (33W)	1	PC	WA AG	СС	SQ	SIL LOGO
• W 18 • HT 15	ANE	3-100W A21 (300W)	1	PC	WA AG	CC	SQ	SIL LOGO
HD2208C	FYA	9,700lm LED (58W)	1	PC	WA AG	СС	SQ	SIL LOGO

• W 22 • HT 11

SAMPLE CATALOG NUMBER

Model Number - Lamping Code - Finish - Mounting - Diffuser - Options

Scale

Abbreviation Key


Lamps

100W A21 Medium Base, 100W Max, Incandesent or LED

Finish Types

PC Powder Coat

Diffuser Types

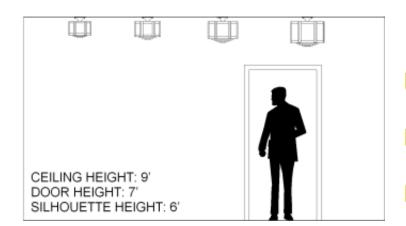

PRODUCT FEATURES

- Fabricated and welded metal housing
- · Powder coated metallic finish
- UV stable, white acrylic diffuser (Standard)
- Optional specialty diffuser materials available
- Energy efficient LED lamping
- High power factor electronic LED driver
- Wired for single circuit operation, Body Lamping
- Standard LED CCT is 3000 Kelvin contact us for alternate color temperature availability
- Standard LED CRI is 80 contact us for alternate CRI availability
- Incandescent lamping is Triac or ELV dimmable consult lamp and dimmer manufacturer for compatibility.
- Standard LED dimming is 0-10v
- Optional line voltage (Triac or ELV) LED dimming is available consult for compatibility
- Mounts to standard electrical junction box (by others)
- UL / cUL or ETL / cETL listed
- Contact Us for more lamping options.

WA	Standard Acrylic Diffuser
AG	Premium Glass Diffuser

Mountings

CC Ceiling Canopy

Louvers

SQ Square Cell

Dimming Types

0 D1 1 D2

Options

SIL Silhouette Symbol LOGO Custom Logo