


Hammond Series Ceiling Mount



Model Number	Lamping Code	Body Lamping	Circuit	Finish	Diffuser	Mounting	Louver	Options
HD1207C	AMY	2-100W A21 (200W)	1	PC	AD AG	CC	CR SQ	SIL LOGO
<ul style="list-style-type: none"> • W 12 • HT 10 								
HD1408C	ANA	3-100W A21 (300W)	1	PC	AD AG	CC	CR SQ	SIL LOGO
<ul style="list-style-type: none"> • W 14 • HT 11 								
HD1609C	GFC	3,900lm LED (27W)	1	PC	AD AG	CC	CR SQ	D1 LOGO SIL
<ul style="list-style-type: none"> • W 16 • HT 12 								
	ANC	3-100W A21 (300W)	1	PC	AD AG	CC	CR SQ	SIL LOGO
HD1811C	GFD	4,200lm LED (33W)	1	PC	AD AG	CC	CR SQ	D1 LOGO SIL
<ul style="list-style-type: none"> • W 18 • HT 15 								
	ANE	3-100W A21 (300W)	1	PC	AD AG	CC	CR SQ	SIL LOGO
HD2208C	FYA	8,500lm LED (53W)	1	PC	AD AG	CC	CR SQ	D1 LOGO SIL
<ul style="list-style-type: none"> • W 22 • HT 11 								

SAMPLE CATALOG NUMBER

Model Number - Lamping Code - Finish - Mounting - Diffuser - Options

Scale

Abbreviation Key


Lamps

100W A21 Medium Base, 100W Max, Incandesent or LED

Finish Types

PC Powder Coat

Diffuser Types

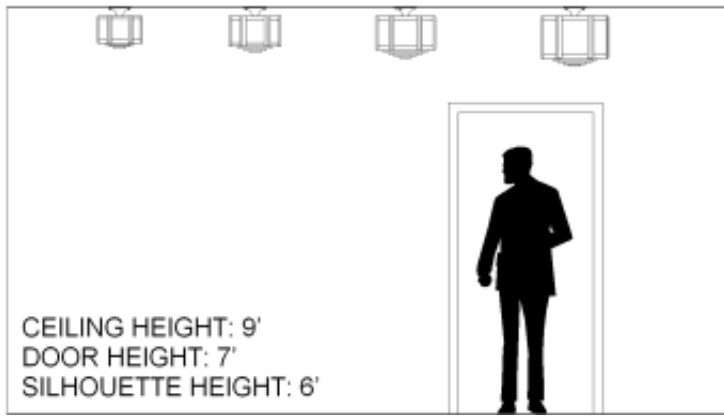

PRODUCT FEATURES

- Fabricated and welded metal housing
- Powder coated metallic finish
- UV stable, white acrylic diffuser (Standard)
- Optional specialty diffuser materials available
- Energy efficient LED or fluorescent lamping
- Wired for single circuit operation (Body Lamping)
- High power factor electronic ballast or LED driver
- Standard LED color temperature is 3000K with 80 CRI. Contact us for other color temperature or CRI options.
- Incandescent lamping is Triac or ELV dimmable - consult lamp and dimmer manufacturer for compatability.
- Optional dimming ballast 120V or 277V (LED or fluorescent lamping)
- Mounts to standard 4" octagonal electrical junction box (by others)
- UL / cUL or ETL / cETL listed
- Contact Us for more lamping options.

- AD Standard Acrylic Diffuser
- AG Premium Glass Diffuser

Mountings

- CC Ceiling Canopy

Louvers

- CR Concentric Ring
- SQ Square Cell

Dimming

- D1 LED 0-10v dimming options include integral 120-277v dimming drivers

Options

- SIL Silhouette Symbol
- LOGO Custom Logo