


## Hammond Series Pendant

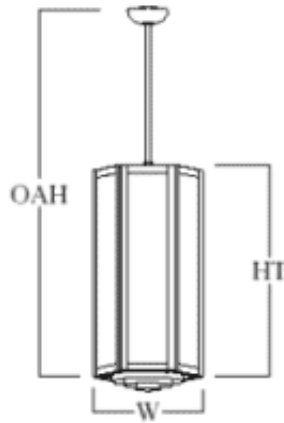

Model Number	Lamping Code	Body Lamping	Down Lamping	Circuit	Finish	Diffuser	Mounting	Louver	Options
<b>HD1224L</b> <ul style="list-style-type: none"> <li>• W 12</li> <li>• HT 26</li> <li>• OAH 72 (OverAll Height)</li> </ul>	GEL	4-60W A19 (240W)	1-100W PAR38 (100W)	2	PC	AD AG	ST CH SM SP	CR SQ	SIL LOGO
<b>HD1426L</b> <ul style="list-style-type: none"> <li>• W 14</li> <li>• HT 28</li> <li>• OAH 96 (OverAll Height)</li> </ul>	DNT	14,500lm LED (86W)	7,100lm LED (47W)	2	PC	AD AG	ST CH SM SP	CR SQ	D1 LOGO SIL
	DNU	14,500lm LED (86W)	12,500lm LED (85W)	2	PC	AD AG	ST CH SM SP	CR SQ	D1 LOGO SIL
	DNW	23,100lm LED (146W)	12,500lm LED (85W)	2	PC	AD AG	ST CH SM SP	CR SQ	D1 LOGO SIL
	FIP	6-60W A19 (360W)	1-100W PAR38 (100W)	2	PC	AD AG	ST CH SM SP	CR SQ	SIL LOGO
<b>HD1631L</b> <ul style="list-style-type: none"> <li>• W 16</li> <li>• HT 33</li> <li>• OAH 96 (OverAll Height)</li> </ul>	DOU	14,500lm LED (86W)	12,500lm LED (85W)	2	PC	AD AG	ST CH SM SP	CR SQ	D1 LOGO SIL
	DMB	23,100lm LED (146W)	12,500lm LED (85W)	2	PC	AD AG	ST CH SM SP	CR SQ	D1 LOGO SIL
	DGD	29,500lm LED (192W)	12,500lm LED (85W)	2	PC	AD AG	ST CH SM SP	CR SQ	D1 LOGO SIL
	FLP	6-60W A19 (360W)	1-100W PAR38 (100W)	2	PC	AD AG	ST CH SM SP	CR SQ	SIL LOGO
<b>HD1836L</b> <ul style="list-style-type: none"> <li>• W 18</li> <li>• HT 39</li> <li>• OAH 120 (OverAll Height)</li> </ul>	FZV	24,900lm LED (159W)	12,500lm LED (85W)	2	PC	AD AG	ST CH SM SP	CR SQ	D1 D2 D31A D32A LOGO SIL


FZW	35,300lm LED (238W)	12,500lm LED (85W)	2	PC	AD AG	ST CH SM SP	CR SQ	D1 D2 D31A D32A LOGO SIL
FIS	9-60W A19 (540W)	1-100W PAR38 (100W)	2	PC	AD AG	ST CH SM SP	CR SQ	SIL LOGO
<b>HD2242L</b>	FIU	9-60W A19 (540W)	2	PC	AD AG	ST CH SM SP	CR SQ	SIL LOGO

- W 22
- HT 45
- OAH 120  
(OverAll Height)

#### SAMPLE CATALOG NUMBER

#### Model Number - Lamping Code - Finish - Mounting - Diffuser - Options

#### Scale

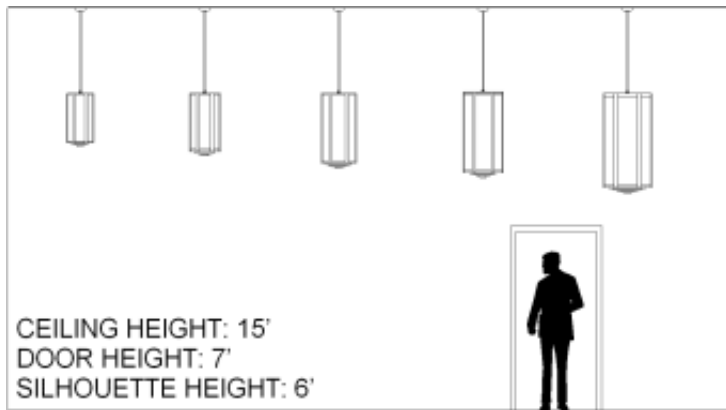

#### PRODUCT FEATURES

- Fabricated and welded metal housing
- Powder coated metallic finish
- UV stable, white acrylic diffuser (Standard)
- Optional specialty diffuser materials available
- Energy efficient LED or fluorescent lamping
- Wired for dual circuit operation (Body Lamping/Down Lamping)
- High power factor electronic ballast or LED driver
- Standard LED color temperature is 3000K with 80 CRI. Contact us for other color temperature or CRI options.
- Incandescent lamping is Triac or ELV dimmable - consult lamp and dimmer manufacturer for compatability.
- Optional dimming ballast 120V or 277V (LED or fluorescent lamping)
- Fixture is Chain or Stem hung (extra length may be added, specify OAH) (OAH - Over All Height - is the length from the ceiling to the bottom of the fixture.)
- Mounts to standard electrical junction box (by others), Box may require additional structural support (by others)
- For slopes greater than 35 degrees (from horizontal) order steep pitch adapter (Stem only)
- UL / cUL or ETL / cETL listed
- Contact Us for more lamping options.

#### Abbreviation Key

##### Lamps

60W A19 Medium Base, 60W Max, Incandesent or LED

##### Finish Types

PC Powder Coat

##### Diffuser Types

AD Standard Acrylic Diffuser

AG Premium Glass Diffuser

##### Mountings

ST Stem

CH Chain

SM Surface Mount Chain

SP Steep Pitch Canopy for Stem

##### Louvers

CR Concentric Ring

SQ Square Cell

##### Dimming

D1 LED 0-10v dimming options include integral 120-277v dimming drivers

D2 LED Triac/ELV dimming options include integral 120v dimming drivers

D31A LED 0-10v wireless dimming options include integral 120v dimming drivers and one wireless module

D32A LED 0-10v wireless dimming options include integral 120v dimming drivers and two wireless modules

##### Options

SIL Silhouette Symbol

LOGO Custom Logo