


# **Hammond Series Pendant**






Model Number	Lamping Code	Body Lamping	Down Lamping	Circuit	Finish	Diffuser	Mounting	Louver	Options
• W 12 • HT 26 • OAH 72 (OverAll Height)	GEL	4-60W A19 (240W)	1-100W PAR38 (100W)	2	PC	WA AG	ST CH SM SP	SQ	SIL LOGO
• W 14 • HT 28 • OAH 96 (OverAll Height)	DNT	14,500lm LED (86W)	7,100lm LED (51W)	2	PC	WA AG	ST CH SM SP	SQ	SIL LOGO
	DNU	14,500lm LED (86W)	12,500lm LED(93W)	2	PC	WA AG	ST CH SM SP	SQ	SIL LOGO
	DNW	23,100lm LED (146W)	12,500lm LED (93W)	2	PC	WA AG	ST CH SM SP	SQ	SIL LOGO
	FIP	6-60W A19 (360W)	1-100W PAR38 (100W)	2	PC	WA AG	ST CH SM SP	SQ	SIL LOGO
+ W 16 • HT 33 • OAH 96 (OverAll Height)	DOU	14,500lm LED (86W)	12,500lm LED (93W)	2	PC	WA AG	ST CH SM SP	SQ	SIL LOGO
	DMB	23,100lm LED (146W)	12,500lm LED (93W)	2	PC	WA AG	ST CH SM SP	SQ	SIL LOGO
	DGD	29,500lm LED (192W)	12,500lm LED (93W)	2	PC	WA AG	ST CH SM SP	SQ	SIL LOGO
	FLP	6-60W A19 (360W)	1-100W PAR38 (100W)	2	PC	WA AG	ST CH SM SP	SQ	SIL LOGO
• W 18 • HT 39 • OAH 120	FZV	24,900lm LED (146W)	12,500lm LED (93W)	2	PC	WA AG	ST CH SM SP	SQ	SIL LOGO

	FZW	35,300lm LED (238W) 9-60W A19 (540W)	12,500lm LED (93W) 1-100W PAR38 (100W)	2	PC PC	WA AG WA AG	ST CH SM SP ST CH SM SP	SQ SQ	SIL LOGO SIL LOGO
• W 22 • HT 45 • OAH 120 (OverAll Height)	GLA	31,000lm LED (185W)	12,500lm LED (93W)	2	PC	WA AG	ST CH SM SP	SQ	SIL LOGO
	FIU	9-60W A19 (540W)	1-100W PAR38 (100W)	2	PC	WA AG	ST CH SM SP	SQ	SIL LOGO

# SAMPLE CATALOG NUMBER

#### Model Number - Lamping Code - Finish - Mounting - Diffuser - Options

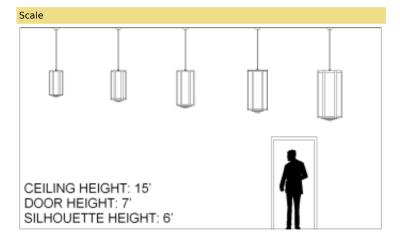

#### PRODUCT FEATURES

- Fabricated and welded metal housing
- Powder coated metallic finish
- UV stable, white acrylic diffuser (Standard)
- Optional specialty diffuser materials available
- Energy efficient LED lamping
- High power factor electronic LED driver
- Wired for dual circuit operation, Body Lamping and Down Lamping
- Standard LED CCT is 3000 Kelvin contact us for alternate color temperature availability
- Standard LED CRI is 80 contact us for alternate CRI availability
- Incandescent lamping is Triac or ELV dimmable consult lamp and dimmer manufacturer for compatibility.
- Standard LED dimming is 0-10v
- Optional line voltage (Triac or ELV) LED dimming is available consult for compatibility
- Fixture is Chain or Stem hung (extra length may be added, specify OAH) (OAH -Over All Height - is the length from the ceiling to the bottom of the fixture.)
- Mounts to standard electrical junction box (by others), Box may require additional structural support (by others)
- For slopes greater than 35 degrees (from horizontal) order steep pitch adapter (Stem only)
- UL / cUL or ETL / cETL listed
- Contact Us for more lamping options.

#### Abbreviation Key

#### Lamps

60W A19 Medium Base, 60W Max, Incandesent or LED 100W PAR38 Medium Base, 100W Max, Incandesent or LED

#### Finish Types

PC Powder Coat

# **Diffuser Types**

WA Standard Acrylic Diffuser
AG Premium Glass Diffuser

# Mountings

ST Stem
CH Chain

SM Surface Mount Chain

SP Steep Pitch Canopy for Stem

#### Louvers

SQ Square Cell

# **Dimming Types**

0 D1 1 D2 2 D3

# Options

SIL Silhouette Symbol LOGO Custom Logo