


## Hammond Series Short Pendant

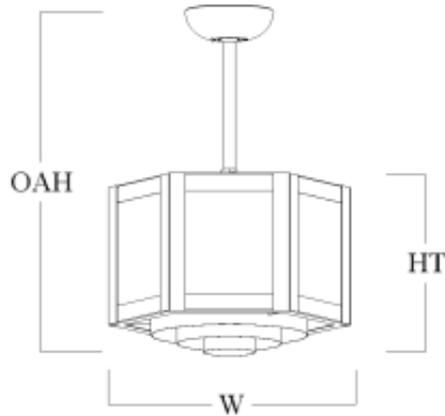


Model Number	Lamping Code	Body Lamping	Circuit	Finish	Diffuser	Mounting	Louver	Options
<b>HD1207P</b>  • W 12 • HT 9 • OAH 48 (OverAll Height)	AMQ	2-100W A21 (200W)	1	PC	WA AG	ST CH SM SP	SQ	SIL LOGO
	GGU	5,400lm LED (33W)	1	PC	WA AG	ST CH SM SP	SQ	SIL LOGO
<b>HD1408P</b>  • W 14 • HT 10 • OAH 48 (OverAll Height)	AMS	3-100W A21 (300W)	1	PC	WA AG	ST CH SM SP	SQ	SIL LOGO
	GFE	5,400lm LED (33W)	1	PC	WA AG	ST CH SM SP	SQ	SIL LOGO
<b>HD1609P</b>  • W 16 • HT 11 • OAH 48 (OverAll Height)	AMU	3-100W A21 (300W)	1	PC	WA AG	ST CH SM SP	SQ	SIL LOGO
	GFF	5,400lm LED (33W)	1	PC	WA AG	ST CH SM SP	SQ	SIL LOGO
<b>HD1811P</b>  • W 18 • HT 14 • OAH 48 (OverAll Height)	AMW	3-100W A21 (300W)	1	PC	WA AG	ST CH SM SP	SQ	SIL LOGO
	FXR	9,700lm LED (58W)	1	PC	WA AG	ST CH SM SP	SQ	SIL LOGO
<b>HD2208P</b>  • W 22 • HT 10 • OAH 48 (OverAll Height)	FYZ	15,800lm LED (116W)	1	PC	WA AG	ST CH SM SP	SQ	SIL LOGO

SAMPLE CATALOG NUMBER

Model Number - Lamping Code - Finish - Mounting - Diffuser - Options

## Scale

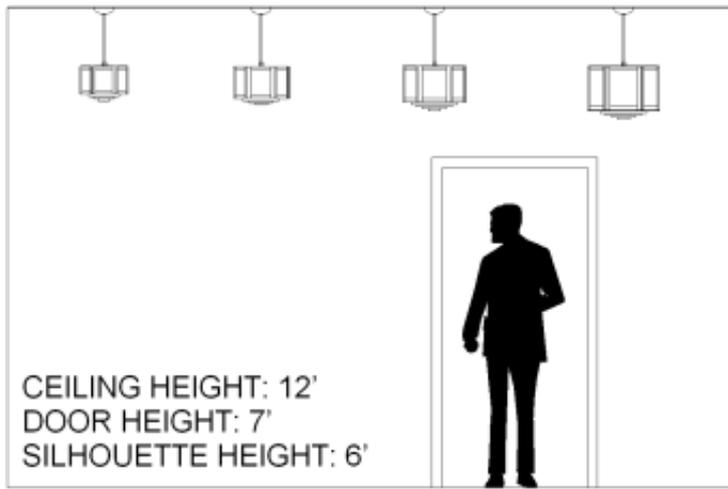

## PRODUCT FEATURES

- Fabricated and welded metal housing
- Powder coated metallic finish
- UV stable, white acrylic diffuser (Standard)
- Optional specialty diffuser materials available
- Energy efficient LED lamping
- High power factor electronic LED driver
- Wired for dual circuit operation, Body Lamping and Down Lamping
- Standard LED CCT is 3000 Kelvin - contact us for alternate color temperature availability
- Standard LED CRI is 80 - contact us for alternate CRI availability
- Incandescent lamping is Triac or ELV dimmable - consult lamp and dimmer manufacturer for compatibility.
- Standard LED dimming is 0-10v
- Optional line voltage (Triac or ELV) LED dimming is available - consult for compatibility
- Fixture is Chain or Stem hung (extra length may be added, specify OAH) (OAH - Over All Height - is the length from the ceiling to the bottom of the fixture.)
- Mounts to standard electrical junction box (by others), Box may require additional structural support (by others)
- For slopes greater than 35 degrees (from horizontal) order steep pitch adapter (Stem only)
- UL / cUL or ETL / cETL listed
- Contact Us for more lamping options.

## Abbreviation Key

### Lamps

100W A21      Medium Base, 100W Max, Incandescent or LED

### Finish Types

PC              Powder Coat

### Diffuser Types

WA              Standard Acrylic Diffuser

AG              Premium Glass Diffuser

### Mountings

ST              Stem

CH              Chain

SM              Surface Mount Chain

SP              Steep Pitch Canopy for Stem

### Louvers

SQ              Square Cell

### Dimming Types

0              D2

1              D1

### Options

SIL              Silhouette Symbol

LOGO              Custom Logo