


Hammond Series Wall Bracket



Model Number	Lamping Code	Body Lamping	Circuit	Finish	Diffuser	Mounting	Louver	Options
HD0816B • W 8 • HT 17 • EXT 10	DEH	2,100lm LED (16W)	1	PC	WA AG	WM	SQ	SIL LOGO BL
	ANP	1-100W A21 (100W)	1	PC	WA AG	WM	SQ	SIL LOGO BL
HD1020B • W 10 • HT 21 • EXT 12	DAG	3,100lm LED (22W)	1	PC	WA AG	WM	SQ	SIL LOGO BL
	ANR	1-100W A21 (100W)	1	PC	WA AG	WM	SQ	SIL LOGO BL
HD1224B • W 12 • HT 26 • EXT 14	FEL	4,400lm LED (33W)	1	PC	WA AG	WM	SQ	SIL LOGO BL
	FEK	1-100W A21 (100W)	1	PC	WA AG	WM	SQ	SIL LOGO BL
HD1426B • W 14 • HT 28 • EXT 16	DEK	6,300lm LED (47W)	1	PC	WA AG	WM	SQ	SIL LOGO BL
	ANW	2-100W A21 (200W)	1	PC	WA AG	WM	SQ	SIL LOGO BL

SAMPLE CATALOG NUMBER
Model Number - Lamping Code - Finish - Mounting - Diffuser - Options

Scale	Abbreviation Key
	Lamps
100W A21	Medium Base, 100W Max, Incandesent or LED
	Finish Types
PC	Powder Coat
	Diffuser Types

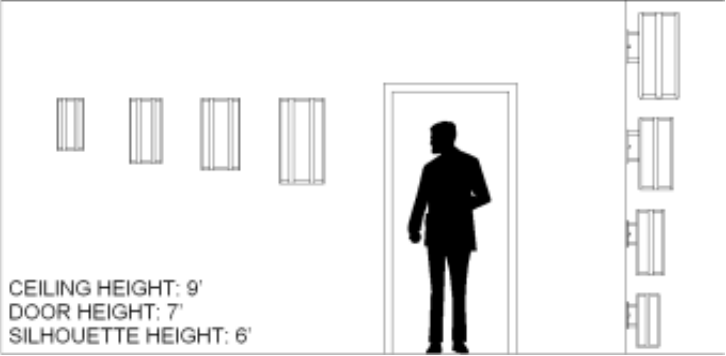

PRODUCT FEATURES

- Fabricated and welded metal housing
- Powder coated metallic finish
- UV stable, white acrylic diffuser (Standard)
- Optional specialty diffuser materials available
- Energy efficient LED lighting
- High power factor electronic LED driver
- Wired for single circuit operation, Body Lighting
- Standard LED CCT is 3000 Kelvin - contact us for alternate color temperature availability
- Standard LED CRI is 80 - contact us for alternate CRI availability
- Incandescent lighting is Triac or ELV dimmable - consult lamp and dimmer manufacturer for compatibility.
- Standard LED dimming is 0-10v
- Optional line voltage (Triac or ELV) LED dimming is available - consult for compatibility
- Mounts to standard electrical junction box (by others)
- UL / cUL or ETL / cETL listed
- Contact Us for more lighting options.

WA	Standard Acrylic Diffuser
AG	Premium Glass Diffuser

Mountings

WM	Wall Mount
----	------------

Louvers

SQ	Square Cell
----	-------------

Dimming Types

0	D1
1	D3

Options

SIL	Silhouette Symbol
LOGO	Custom Logo
BL	Bottom Lens