

# **Hartford Series 2-Tier Large Pendant**





Model Number	Lamping Code	Gallery Lamping	Down Lamping	Circuit	Finish	Diffuser	Mounting	Louver	Options
HF2412W	FYS	11,900lm LED (77W)		1	PC	WA AG	TC	SQ	CUT LOGO
• W 24 • HT 14 • OAH 48 (OverAll Height)	GLI	6-60W A19 (360W)	1-100W PAR38 (100W)	2	PC	WA AG	TC	SQ	CUT LOGO
HF3014W	FYT	17,300lm LED (116W)		1	PC	WA AG	TC	SQ	CUT LOGO
• W 30 • HT 16 • OAH 72 (OverAll Height)	GLJ	6-60W A19 (360W)	1-100W R40/Par38 (100W)	2	PC	WA AG	TC	SQ	CUT LOGO
HF3616W	DVJ	35,200lm LED (216W)	7,100lm LED (51W)	2	PC	WA AG	TC	SQ	CUT LOGO
• W 36 • HT 19 • OAH 96 (OverAll Height)	FWH	6-100W A21 (600W)	1-100W R40/Par38 (100W)	2	PC	WA AG	TC	SQ	CUT LOGO
HF4218W	DZT	35,200lm LED (216W)	12,500lm LED (93W)	2	PC	WA AG	TC	SQ	CUT LOGO
• W 42 • HT 21 • OAH 96 (OverAll Height)	FWI	12-100W A21 (1200W)	1-100W R40/Par38 (100W)	2	PC	WA AG	TC	SQ	CUT LOGO
HF5422W	DVL	42,200lm LED (260W)	12,500lm LED (93W)	2	PC	WA AG	TC	SQ	CUT LOGO
• W 54" • HT 22" • OAH 120" (OverAll Height)	FWJ	12-100W A21 (1200W)	1-100W R40/Par38 (100W)	2	PC	WA AG	TC	SQ	CUT LOGO

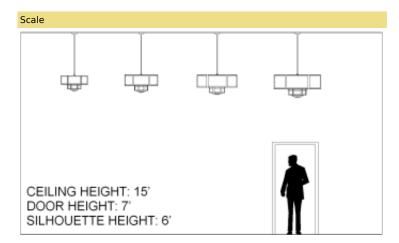

#### PRODUCT FEATURES

- Fabricated and welded metal housing
- · Powder coated metallic finish
- UV stable, white acrylic diffuser (Standard)
- · Optional specialty diffuser materials available
- Energy efficient LED lamping
- High power factor electronic LED driver
- Wired for dual circuit operation, Gallery Lamping and Down Lamping
- Standard LED CCT is 3000 Kelvin contact us for alternate color temperature availability
- Standard LED CRI is 80 contact us for alternate CRI availability
- Incandescent lamping is Triac or ELV dimmable consult lamp and dimmer manufacturer for compatibility.
- Standard LED dimming is 0-10v
- Optional line voltage (Triac or ELV) LED dimming is available consult for compatibility
- Fixture is Chain or Stem hung (extra length may be added, specify OAH) (OAH -Over All Height - is the length from the ceiling to the bottom of the fixture.)
- Mounts to standard electrical junction box (by others), Box requires additional structural support (by others)
- For slopes greater than 35 degrees (from horizontal) order steep pitch adapter (Stem only)
- UL / cUL or ETL / cETL listed
- Contact Us for more lamping options.

# Abbreviation Key

#### Lamps

60W A19 Medium Base, 60W Max, Incandesent or LED 100W PAR38 Medium Base, 100W Max, Incandesent or LED

#### Finish Types

PC Powder Coat

# **Diffuser Types**

WA Standard Acrylic Diffuser
AG Premium Glass Diffuser

#### Mountings

TC Triple Chain Spreader

# Louvers

SQ Square Cell

# **Dimming Types**

0 D1 1 D2 2 D3

#### Options

CUT Cut-Out Symbol
LOGO Custom Logo