


Hartford Series 2-Tier Large Pendant

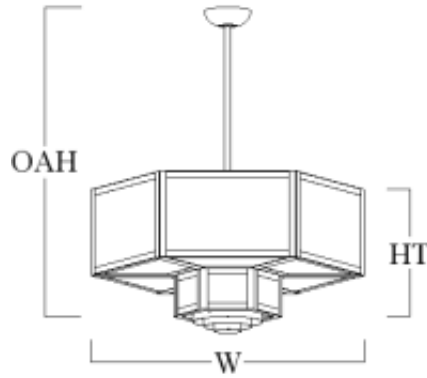


Model Number	Lamping Code	Gallery Lamping	Down Lamping	Circuit	Finish	Diffuser	Mounting	Louver	Options
HF2412W	ACT	6-100W A21 (600W)	1-300W R40 (300W)	2	PC	AD AG	TC	CR SQ	CUT LOGO
<ul style="list-style-type: none"> • W 24" • HT 14" • OAH 48" (OverAll Height) 									
HF3014W	ACV	6-150W A21 (900W)	1-300W R40 (300W)	2	PC	AD AG	TC	CR SQ	CUT LOGO
<ul style="list-style-type: none"> • W 30" • HT 16" • OAH 72" (OverAll Height) 									
HF3616W	DFT	6-200W A21 (1200W)	1-300W R40 (300W)	2	PC	AD AG	TC	CR SQ	CUT LOGO
<ul style="list-style-type: none"> • W 36" • HT 19" • OAH 96" (OverAll Height) 									
	DVJ	35,300lm LED (215W)	7,000lm LED (47W)	2	PC	AD AG	TC	CR SQ	CUT D1 LOGO
HF4218W	EIS	12-100W A19 (1200W)	1-300W R40 (300W)	2	PC	AD AG	TC	CR SQ	CUT LOGO
<ul style="list-style-type: none"> • W 42" • HT 21" • OAH 96" (OverAll Height) 									
	DZT	35,300lm LED (215W)	12,000lm LED (100W)	2	PC	AD AG	TC	CR SQ	CUT D1 LOGO
HF5422W	EIR	12-150W A21 (1800W)	1-300W R40 (300W)	2	PC	AD AG	TC	CR SQ	CUT LOGO
<ul style="list-style-type: none"> • W 54" • HT 22" • OAH 120" (OverAll Height) 									
	DVL	42,400lm LED (264W)	12,000lm LED (100W)	2	PC	AD AG	TC	CR SQ	CUT D1 LOGO

SAMPLE CATALOG NUMBER

Model Number - Lamping Code - Finish - Mounting - Diffuser - Options

Scale

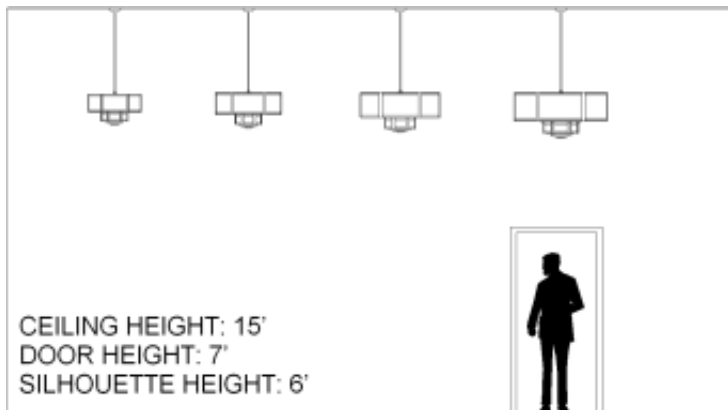

PRODUCT FEATURES

- Fabricated and welded metal housing
- Powder coated metallic finish
- UV stable, white acrylic diffuser (Standard)
- Optional specialty diffuser materials available
- Energy efficient LED or fluorescent lamping
- Wired for two circuit operation (Gallery Lamping/Down Lamping)
- High power factor electronic ballast or LED driver
- Incandescent lamping is Triac or ELV dimmable - consult lamp and dimmer manufacturer for compatibility.
- Optional dimming ballast 120V or 277V (LED or fluorescent lamping)
- Fixture may be Chain or Stem hung (extra length may be added, specify OAH) (OAH - Over All Height - is the length from the ceiling to the bottom of the fixture.)
- Mounts to standard 4" octagonal electrical junction box (by others), Box requires additional structural support (by others)
- For slopes greater than 35 degrees (from horizontal) order steep pitch adapter (Stem only)
- UL / cUL or ETL / cETL listed
- Contact Us for more lamping options.

Abbreviation Key

Dimensions

W	Width
HT	Height
OAH	OverAll Height

Lamps

100W A21	Medium Base, 100W Max, Incandescent or LED
300W R40	300W R40, medium base
150W A21	150W A21, medium base
200W A21	200W A21, medium base
100W A19	100W A19, medium base

Finish Types

PC	Powder Coat
----	-------------

Diffuser Types

AD	Standard Acrylic Diffuser
AG	Premium Glass Diffuser

Mountings

TC	Triple Chain Spreader
----	-----------------------

Louvers

CR	Concentric Ring
SQ	Square Cell

Options

CUT	Cut-Out Symbol
LOGO	Custom Logo
D1	LED 0-10V low voltage control dimming