


Hartford Series Pendant

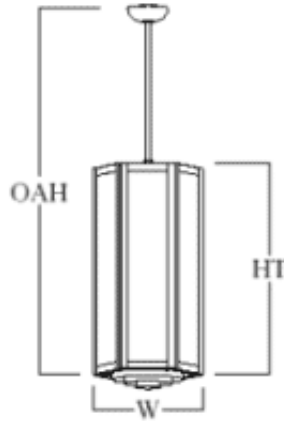


Model Number	Lamping Code	Body Lamping	Down Lamping	Circuit	Finish	Diffuser	Mounting	Louver	Options
HF1222L	AAD	3-100W A21 (300W)	1-300W R40 (300W)	2	PC	AD AG	ST TC SP	CR SQ	CUT LOGO
<ul style="list-style-type: none"> • W 12" • HT 24" • OAH 72" (OverAll Height) 									
HF1426L	DVG	14,500lm LED (88W)	5,000lm LED (33W)	2	PC	AD AG	ST TC SP	CR SQ	CUT D1 LOGO
<ul style="list-style-type: none"> • W 14" • HT 29" • OAH 96" (OverAll Height) 									
	DFB	14,500lm LED (88W)	7,000lm LED (47W)	2	PC	AD AG	ST TC SP	CR SQ	CUT D1 LOGO
	DTG	14,500lm LED (88W)	12,000lm LED (100W)	2	PC	AD AG	ST TC SP	CR SQ	CUT D1 LOGO
	DFJ	23,100lm LED (146W)	12,000lm LED (100W)	2	PC	AD AG	ST TC SP	CR SQ	CUT D1 LOGO
	DHI	6-100W A21 (600W)	1-300W R40 (300W)	2	PC	AD AG	ST TC SP	CR SQ	CUT LOGO
HF1631L	DFA	14,500lm LED (88W)	12,000lm LED (100W)	2	PC	AD AG	ST TC SP	CR SQ	CUT D1 LOGO
<ul style="list-style-type: none"> • W 16" • HT 34" • OAH 96" (OverAll Height) 									
	DLX	23,100lm LED (146W)	12,000lm LED (100W)	2	PC	AD AG	ST TC SP	CR SQ	CUT D1 LOGO
	DCR	29,500lm LED (194W)	12,000lm LED (100W)	2	PC	AD AG	ST TC SP	CR SQ	CUT D1 LOGO
	DHJ	6-100W A21 (600W)	1-300W R40 (300W)	2	PC	AD AG	ST TC SP	CR SQ	CUT LOGO
HF1836L	DDL	23,500lm LED (131W)	12,000lm LED (100W)	2	PC	AD AG	ST TC SP	CR SQ	CUT D1 LOGO
<ul style="list-style-type: none"> • W 18" • HT 40" • OAH 120" (OverAll Height) 									
	DHK	9-100W A21 (900W)	1-300W R40 (300W)	2	PC	AD AG	ST TC SP	CR SQ	CUT LOGO

HF2242L	DNF	32,300lm LED (197W)	12,000lm LED (100W)	2	PC	AD AG	ST TC SP	CR SQ	CUT D1 LOGO
<ul style="list-style-type: none"> • W 22" • HT 46" • OAH 120" (OverAll Height) 	FCC	9-100W A21 (900W)	1-300W R40 (300W)	3	PC	AD AG	ST TC SP	CR SQ	CUT LOGO

SAMPLE CATALOG NUMBER

Model Number - Lamping Code - Finish - Mounting - Diffuser - Options

Scale

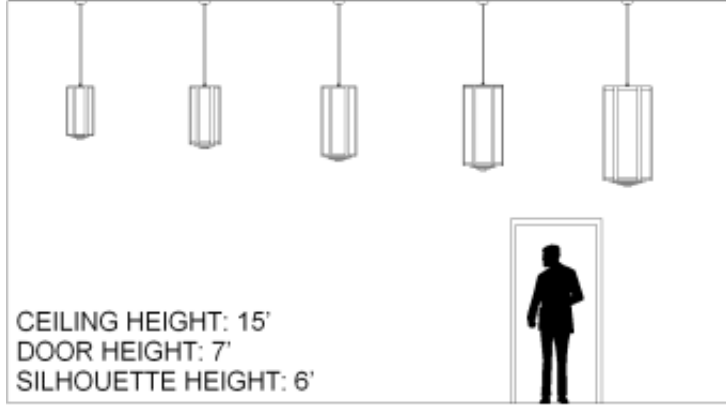

PRODUCT FEATURES

- Fabricated and welded metal housing
- Powder coated metallic finish
- UV stable, white acrylic diffuser (Standard)
- Optional specialty diffuser materials available
- Energy efficient LED or fluorescent lamping
- Wired for dual circuit operation (Body Lamping/Down Lamping)
- High power factor electronic ballast or LED driver
- Incandescent lamping is Triac or ELV dimmable - consult lamp and dimmer manufacturer for compatability.
- Optional dimming ballast 120V or 277V (LED or fluorescent lamping)
- Fixture is Chain or Stem hung (extra length may be added, specify OAH) (OAH - Over All Height - is the length from the ceiling to the bottom of the fixture.)
- Mounts to standard electrical junction box (by others), Box may require additional structural support (by others)
- For slopes greater than 35 degrees (from horizontal) order steep pitch adapter (Stem only)
- UL / cUL or ETL / cETL listed
- Contact Us for more lamping options.

Abbreviation Key

Dimensions

W	Width
HT	Height
OAH	OverAll Height

Lamps

100W A21	Medium Base, 100W Max, Incandesent or LED
300W R40	300W R40, medium base

Finish Types

PC	Powder Coat
----	-------------

Diffuser Types

AD	Standard Acrylic Diffuser
AG	Premium Glass Diffuser

Mountings

ST	Stem
TC	Triple Chain Spreader
SP	Steep Pitch Canopy for Stem

Louvers

CR	Concentric Ring
SQ	Square Cell

Options

CUT	Cut-Out Symbol
LOGO	Custom Logo
D1	LED 0-10V low voltage control dimming