


## Hartford Series Pendant

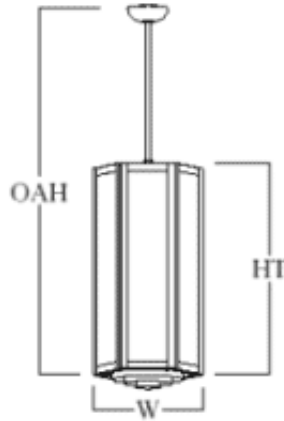


Model Number	Lamping Code	Body Lamping	Down Lamping	Circuit	Finish	Diffuser	Mounting	Louver	Options
<b>HF1222L</b> <ul style="list-style-type: none"> <li>• W 12"</li> <li>• HT 24"</li> <li>• OAH 72"</li> </ul> (OverAll Height)	AAD	3-100W A21 (300W)	1-300W R40 (300W)	2	PC	AD AG	ST TC SP	CR SQ	CUT LOGO
<b>HF1426L</b> <ul style="list-style-type: none"> <li>• W 14"</li> <li>• HT 29"</li> <li>• OAH 96"</li> </ul> (OverAll Height)	DVG	14,500lm LED (88W)	5,000lm LED (33W)	2	PC	AD AG	ST TC SP	CR SQ	CUT D1 LOGO
	DFB	14,500lm LED (88W)	7,000lm LED (47W)	2	PC	AD AG	ST TC SP	CR SQ	CUT D1 LOGO
	DTG	14,500lm LED (88W)	12,000lm LED (100W)	2	PC	AD AG	ST TC SP	CR SQ	CUT D1 LOGO
	DFJ	23,100lm LED (146W)	12,000lm LED (100W)	2	PC	AD AG	ST TC SP	CR SQ	CUT D1 LOGO
	DHI	6-100W A21 (600W)	1-300W R40 (300W)	2	PC	AD AG	ST TC SP	CR SQ	CUT LOGO
<b>HF1631L</b> <ul style="list-style-type: none"> <li>• W 16"</li> <li>• HT 34"</li> <li>• OAH 96"</li> </ul> (OverAll Height)	DFA	14,500lm LED (88W)	12,000lm LED (100W)	2	PC	AD AG	ST TC SP	CR SQ	CUT D1 LOGO
	DLX	23,100lm LED (146W)	12,000lm LED (100W)	2	PC	AD AG	ST TC SP	CR SQ	CUT D1 LOGO
	DCR	29,500lm LED (194W)	12,000lm LED (100W)	2	PC	AD AG	ST TC SP	CR SQ	CUT D1 LOGO
	DHJ	6-100W A21 (600W)	1-300W R40 (300W)	2	PC	AD AG	ST TC SP	CR SQ	CUT LOGO
<b>HF1836L</b> <ul style="list-style-type: none"> <li>• W 18"</li> <li>• HT 40"</li> <li>• OAH 120"</li> </ul> (OverAll Height)	DDL	23,500lm LED (131W)	12,000lm LED (100W)	2	PC	AD AG	ST TC SP	CR SQ	CUT D1 LOGO
	DHK	9-100W A21 (900W)	1-300W R40 (300W)	2	PC	AD AG	ST TC SP	CR SQ	CUT LOGO

<b>HF2242L</b>	DNF	32,300lm LED (197W)	12,000lm LED (100W)	2	PC	AD AG	ST TC SP	CR SQ	CUT D1 LOGO
<ul style="list-style-type: none"> <li>• W 22"</li> <li>• HT 46"</li> <li>• OAH 120" (OverAll Height)</li> </ul>	FCC	9-100W A21 (900W)	1-300W R40 (300W)	3	PC	AD AG	ST TC SP	CR SQ	CUT LOGO

**SAMPLE CATALOG NUMBER**

**Model Number - Lamping Code - Finish - Mounting - Diffuser - Options**

**Scale**

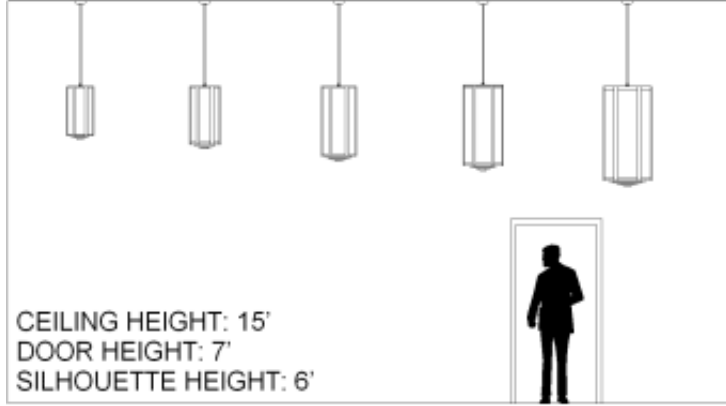

**PRODUCT FEATURES**

- Fabricated and welded metal housing
- Powder coated metallic finish
- UV stable, white acrylic diffuser (Standard)
- Optional specialty diffuser materials available
- Energy efficient LED or fluorescent lamping
- Wired for dual circuit operation (Body Lamping/Down Lamping)
- High power factor electronic ballast or LED driver
- Incandescent lamping is Triac or ELV dimmable - consult lamp and dimmer manufacturer for compatability.
- Optional dimming ballast 120V or 277V (LED or fluorescent lamping)
- Fixture is Chain or Stem hung (extra length may be added, specify OAH) (OAH - Over All Height - is the length from the ceiling to the bottom of the fixture.)
- Mounts to standard electrical junction box (by others), Box may require additional structural support (by others)
- For slopes greater than 35 degrees (from horizontal) order steep pitch adapter (Stem only)
- UL / cUL or ETL / cETL listed
- Contact Us for more lamping options.

**Abbreviation Key**

**Dimensions**

W	Width
HT	Height
OAH	OverAll Height

**Lamps**

100W A21	Medium Base, 100W Max, Incandesent or LED
300W R40	300W R40, medium base

**Finish Types**

PC	Powder Coat
----	-------------

**Diffuser Types**

AD	Standard Acrylic Diffuser
AG	Premium Glass Diffuser

**Mountings**

ST	Stem
TC	Triple Chain Spreader
SP	Steep Pitch Canopy for Stem

**Louvers**

CR	Concentric Ring
SQ	Square Cell

**Options**

CUT	Cut-Out Symbol
LOGO	Custom Logo
D1	LED 0-10V low voltage control dimming