


Houston Series 3-Arm Cluster Pendant

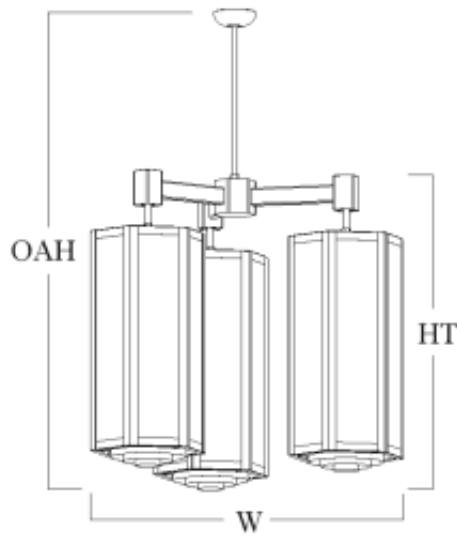


Model Number	Lamping Code	Body Lamping	Down Lamping	Circuit	Finish	Diffuser	Mounting	Louver	Options
HO2724U <ul style="list-style-type: none"> • W 38" • HT 32" • OAH 96" (OverAll Height) • Y 3 @ 12"x24" 	FDH	9-100W A21 (900W)	3-300W R40 (900W)	2	PC	AD AG	ST SP	CR SQ	SIL
HO3026U <ul style="list-style-type: none"> • W 42" • HT 34" • OAH 10' (OverAll Height) • X 3 @ 14"x26" 	DQK	44,100lm LED (262W)	21,000lm LED (139W)	2	PC	AD AG	ST SP	CR SQ	D1 SIL
	DQM	70,100lm LED (436W)	36,000lm LED (298W)	2	PC	AD AG	ST SP	CR SQ	D1 SIL
	DIU	18-100W A21 (1800W)	3-300W R40 (900W)	2	PC	AD AG	ST SP	CR SQ	SIL
HO3931U <ul style="list-style-type: none"> • W 53" • HT 39" • OAH 10' (OverAll Height) • X 3 @ 16"x31" 	DQN	43,600lm LED (262W)	36,000lm LED (298W)	2	PC	AD AG	ST SP	CR SQ	D1 SIL
	DQO	70,100lm LED (436W)	36,000lm LED (298W)	2	PC	AD AG	ST SP	CR SQ	D1 SIL
	DQP	89,500lm LED (581W)	36,000lm LED (298W)	2	PC	AD AG	ST SP	CR SQ	D1 SIL
	DIV	18-100W A21 (1800W)	3-300W R40 (900W)	2	PC	AD AG	ST SP	CR SQ	SIL
HO4836U <ul style="list-style-type: none"> • W 64" • HT 44" • OAH 10' (OverAll Height) • X 3 @ 18"x36" 	DQQ	70,700lm LED (393W)	36,000lm LED (298W)	2	PC	AD AG	ST SP	CR SQ	D1 SIL
	DQR	94,300lm LED (523W)	36,000lm LED (298W)	2	PC	AD AG	ST SP	CR SQ	D1 SIL
	DIW	27-100W A21 (2700W)	3-300W R40 (900W)	3	PC	AD AG	ST SP	CR SQ	SIL

SAMPLE CATALOG NUMBER

Model Number - Lamping Code - Finish - Mounting - Diffuser - Options

Scale

Abbreviation Key

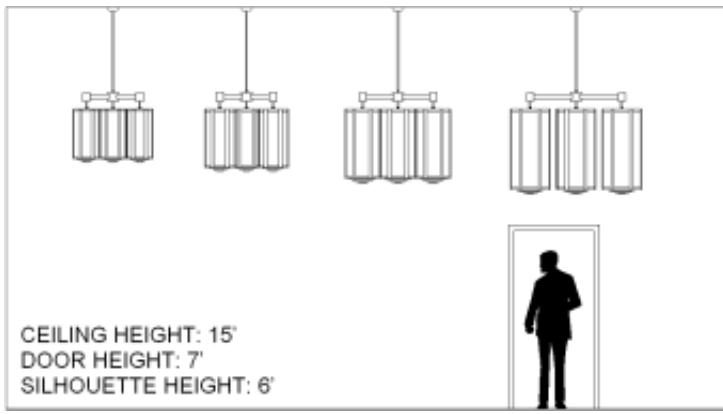

PRODUCT FEATURES

- Fabricated and welded metal housing
- Powder coated metallic finish
- UV stable, white acrylic diffuser (Standard)
- Optional specialty diffuser materials available
- Energy efficient LED or fluorescent lamping
- Wired for dual circuit operation (Body Lamping/Down Lamping)
- High power factor electronic ballast or LED driver
- Incandescent lamping is Triac or ELV dimmable - consult lamp and dimmer manufacturer for compatibility.
- Optional dimming ballast 120V or 277V (LED or fluorescent lamping)
- Fixture may be Chain or Stem hung (extra length may be added, specify OAH) (OAH - Over All Height - is the length from the ceiling to the bottom of the fixture.)
- Mounts to standard 4" octagonal electrical junction box (by others), Box requires additional structural support (by others)
- For slopes greater than 35 degrees (from horizontal) order steep pitch adapter (Stem only)
- UL / cUL or ETL / cETL listed
- Contact Us for more lamping options.

Dimensions

W	Width
HT	Height
OAH	OverAll Height
Y	Y-Dimension
X	X-Dimension

Lamps

100W A21	Medium Base, 100W Max, Incandescent or LED
300W R40	300W R40, medium base

Finish Types

PC	Powder Coat
----	-------------

Diffuser Types

AD	Standard Acrylic Diffuser
AG	Premium Glass Diffuser

Mountings

ST	Stem
SP	Steep Pitch Canopy for Stem

Louvers

CR	Concentric Ring
SQ	Square Cell

Options

SIL	Silhouette Symbol
D1	LED 0-10V low voltage control dimming