Houston Series Wall Bracket






Model Number	Lamping Code	Body Lamping	Circuit	Finish	Diffuser	Mounting	Louver	Options
HO0816B • W 8" • HT 16" • EXT 10"	DED	2,100lm LED (16W)	1	PC	WA AG	WM	SQ	SIL LOGO E BL CN
	ACK	1-100W A21 (100W)	1	PC	WA AG	WM	SQ	SIL LOGO E BL CN
• W 10" • HT 20" • EXT 12"	DEE	3,100lm LED (22W)	1	PC	WA AG	WM	SQ	SIL LOGO E BL CN
	ACM	1-100W A21 (100W)	1	PC	WA AG	WM	SQ	SIL LOGO E BL CN
• W 12" • HT 24" • EXT 14"	FEJ	4,500lm LED (33W)	1	PC	WA AG	WM	SQ	SIL LOGO E BL CN
	FEI	1-100W A21 (100W)	1	PC	WA AG	WM	SQ	SIL LOGO E BL CN
• W 14" • HT 26" • EXT 16"	DEG	6,300lm LED (47W)	1	PC	WA AG	WM	SQ	SIL LOGO E BL CN
	ACR	2-100W A21 (200W)	1	PC	WA AG	WM	SQ	SIL LOGO E BL CN

SAMPLE CATALOG NUMBER

Model Number - Lamping Code - Finish - Mounting - Diffuser - Options

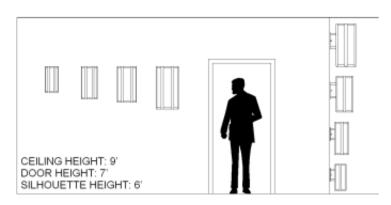

PRODUCT FEATURES

- Fabricated and welded metal housing
- Powder coated metallic finish
- UV stable, white acrylic diffuser (Standard)
- Optional specialty diffuser materials available
 Energy efficient LED lamping
- High power factor electronic LED driver
- Wired for single circuit operation, Body Lamping
- Standard LED CCT is 3000 Kelvin contact us for alternate color temperature availability
- Standard LED CRI is 80 contact us for alternate CRI availability
- Incandescent lamping is Triac or ELV dimmable consult lamp and dimmer manufacturer for compatibility.
- Standard LED dimming is 0-10v
- Optional line voltage (Triac or ELV) LED dimming is available consult for compatibility
- Mounts to standard electrical junction box (by others)
- UL / cUL or ETL / cETL listed
- Contact Us for more lamping options.

Lamps

100W A21 Medium Base, 100W Max, Incandesent or LED

Finish Types

PC **Powder Coat**

Diffuser Types

WA Standard Acrylic Diffuser Premium Glass Diffuser AG

Mountings

Wall Mount WM

Louvers

SQ Square Cell

Dimming Types

0 D1 1 D2

Options

SIL Silhouette Symbol LOGO Custom Logo Е Exterior **Bottom Lens** BLCN Cone Top (Exterior)