


Ipswich Series 3-Arm Cluster Pendant

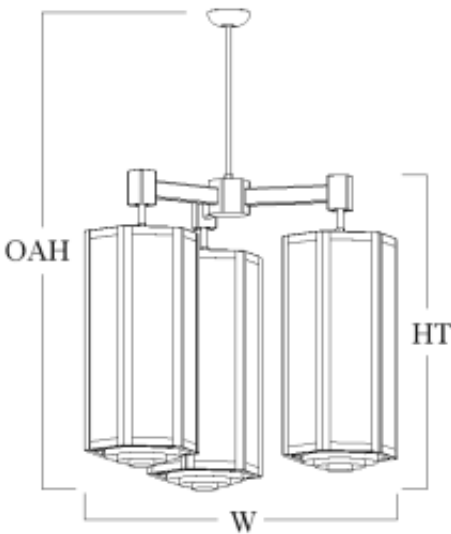


Model Number	Lamping Code	Body Lamping	Down Lamping	Circuit	Finish	Diffuser	Mounting	Louwer
IP2724U • W 37 • HT 32 • OAH 96 (OverAll Height) • Y 3 @ 12"x26"	GCB	12-60W A19 (720W)	3-100W A19 (300W)	2	PC	WA AG	ST SP	SQ
IP3026U • W 42 • HT 34 • OAH 96 (OverAll Height) • Y 3 @ 14"x29"	DQK	43,600lm LED (258W)	21,400lm LED (152W)	2	PC	WA AG	ST SP	SQ
	DQM	69,300lm LED (436W)	37,600lm LED (278W)	2	PC	WA AG	ST SP	SQ
	FKW	18-60W A19 (1080W)	3-100W A21 (300W)	2	PC	WA AG	ST SP	SQ
IP3931U • W 53 • HT 39 • OAH 120 (OverAll Height) • Y 3 @ 16"x34"	DQN	43,600lm LED (258W)	37,600lm LED (278W)	2	PC	WA AG	ST SP	SQ
	DQO	69,300lm LED (436W)	37,600lm LED (278W)	2	PC	WA AG	ST SP	SQ
	DQP	88,700lm LED (575W)	37,600lm LED (278W)	2	PC	WA AG	ST SP	SQ
	FKX	18-60W A19 (1080W)	3-100W A21 (300W)	2	PC	WA AG	ST SP	SQ
IP4836U	GAB	53,600lm LED (298W)	15,500lm LED (108W)	2	PC	WA AG	ST SP	SQ
• W 63 • HT 44 • OAH 120 (OverAll Height) • Y 3 @ 18"x40"								

GAC	53,600lm LED (298W)	37,600lm LED (278W)	2	PC	WA AG	ST SP	SQ
FYV	74,800lm LED (436W)	37,600lm LED (278W)	2	PC	WA AG	ST SP	SQ
FYW	105,900lm LED (713W)	37,600lm LED (278W)	2	PC	WA AG	ST SP	SQ
FKY	27-60W A19 (1620W)	3-100W A21 (300W)	3	PC	WA AG	ST SP	SQ

SAMPLE CATALOG NUMBER

Model Number - Lamping Code - Finish - Mounting - Diffuser - Options

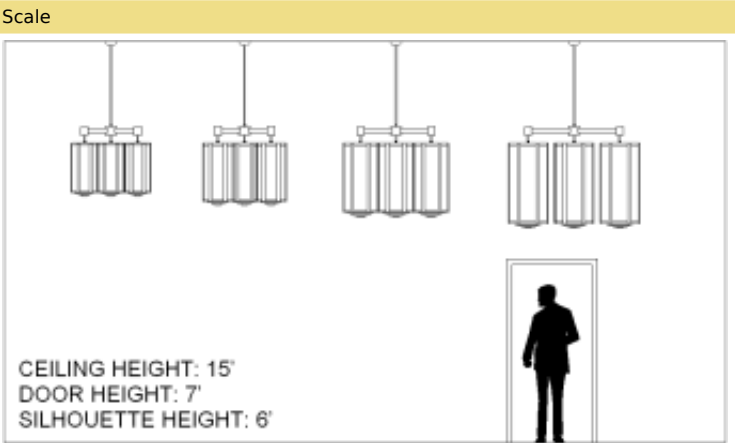

PRODUCT FEATURES

- Fabricated and welded metal housing
- Powder coated metallic finish
- UV stable, white acrylic diffuser (Standard)
- Optional specialty diffuser materials available
- Energy efficient LED lamping
- High power factor electronic LED driver
- Wired for dual circuit operation, Body Lamping and Down Lamping
- Standard LED CCT is 3000 Kelvin - contact us for alternate color temperature availability
- Standard LED CRI is 80 - contact us for alternate CRI availability
- Incandescent lamping is Triac or ELV dimmable - consult lamp and dimmer manufacturer for compatibility.
- Standard LED dimming is 0-10v
- Optional line voltage (Triac or ELV) LED dimming is available - consult for compatibility
- Fixture is Chain or Stem hung (extra length may be added, specify OAH) (OAH - Over All Height - is the length from the ceiling to the bottom of the fixture.)
- Mounts to standard electrical junction box (by others), Box requires additional structural support (by others)
- For slopes greater than 35 degrees (from horizontal) order steep pitch adapter (Stem only)
- UL / cUL or ETL / cETL listed
- Contact Us for more lamping options.

Abbreviation Key

Lamps

- 60W A19 Medium Base, 60W Max, Incandescent or LED
- 100W A19 Medium Base, 100W Max, Incandescent or LED

Finish Types

- PC Powder Coat

Diffuser Types

- WA Standard Acrylic Diffuser
- AG Premium Glass Diffuser

Mountings

- ST Stem
- SP Steep Pitch Canopy for Stem

Louvers

- SQ Square Cell

Dimming Types

- 0 D3
- 1 D1
- 2 D2