


# **Ipswich Series Ceiling Mount**






Model Number	Lamping Body Lampin Code	ng	Circuit	Finish	Diffuser	Mounting	Louver
IP1207C  • W 12"  • HT 10"	ABT	2-100W A21 (200W)	1	PC	WA AG	CC FM	SQ
IP1408C • W 14" • HT 11"	GHB	5,400lm LED (33W)	1	PC	WA AG	CC FM	SQ
	ABV	3-100W A21 (300W)	1	PC	WA AG	CC FM	SQ
IP1609C  • W 16"  • HT 12"	GJK	5,400lm LED (33W)	1	PC	WA AG	CC FM	SQ
	ABX	3-100W A21 (300W)	1	PC	WA AG	CC FM	SQ
IP1811C  • W 18" • HT 14"	GHD	5,400lm LED (33W)	1	PC	WA AG	CC FM	SQ
	ABZ	3-100W A21 (300W)	1	PC	WA AG	CC FM	SQ
IP2208C  • W 22"  • HT 11"	FXI	9,700lm LED (58W)	1	PC	WA AG	CC FM	SQ
	GML	13,600lm LED (109W)	1	PC	WA AG	CC FM	SQ
	GEM	6-60W A19 (360W)	1	PC	WA AG	CC FM	SQ

# Model Number - Lamping Code - Finish - Mounting - Diffuser - Options

# Scale

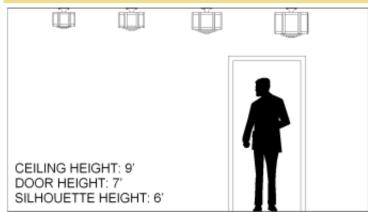

# PRODUCT FEATURES

- · Fabricated and welded metal housing
- · Powder coated metallic finish
- UV stable, white acrylic diffuser (Standard)
- Optional specialty diffuser materials available
- Energy efficient LED lamping
- High power factor electronic LED driver
- Wired for single circuit operation, Body Lamping
- Standard LED CCT is 3000 Kelvin contact us for alternate color temperature availability
- Standard LED CRI is 80 contact us for alternate CRI availability
- Incandescent lamping is Triac or ELV dimmable consult lamp and dimmer manufacturer for compatibility.
- Standard LED dimming is 0-10v
- Optional line voltage (Triac or ELV) LED dimming is available consult for compatibility
- Mounts to standard electrical junction box (by others)
- UL / cUL or ETL / cETL listed
- Contact Us for more lamping options.

# Abbreviation Key

### Lamps

100W A21 Medium Base, 100W Max, Incandesent or LED 60W A19 Medium Base, 60W Max, Incandesent or LED

# Finish Types

PC Powder Coat

# **Diffuser Types**

WA Standard Acrylic Diffuser
AG Premium Glass Diffuser

### Mountings

CC Ceiling Canopy
FM Flush Mount

# Louvers

SQ Square Cell

### **Dimming Types**

0 D1 1 D2