


## Jamestown Series 3-Arm Cluster Pendant

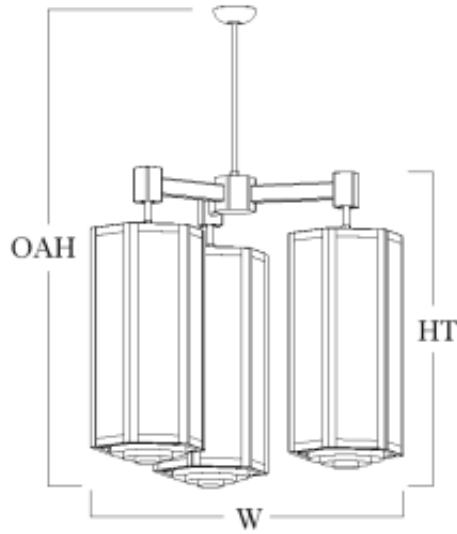


| Model Number   | Lamping Code | Body Lamping        | Down Lamping        | Circuit | Finish | Diffuser | Mounting | Louver |
|--|--------------|---------------------|---------------------|---------|--------|----------|----------|--------|
| <b>JT2724U</b>   | GCB          | 12-60W A19 (720W)   | 3-100W A19 (300W)   | 2       | PC     | AD<br>AG | ST<br>SP | SQ     |
| <ul style="list-style-type: none"> <li>• W 37</li> <li>• HT 32</li> <li>• OAH 96<br/>(OverAll Height)</li> <li>• Y 3 @ 12"x26"</li> </ul>  |              |                     |                     |         |        |          |          |        |
| <b>JT3026U</b>   | DQK          | 43,600lm LED (258W) | 21,400lm LED (139W) | 2       | PC     | AD<br>AG | ST<br>SP | SQ     |
| <ul style="list-style-type: none"> <li>• W 42</li> <li>• HT 34</li> <li>• OAH 96<br/>(OverAll Height)</li> <li>• Y 3 @ 14"x28"</li> </ul>  |              |                     |                     |         |        |          |          |        |
|  | DQM          | 69,300lm LED (436W) | 37,600lm LED (255W) | 2       | PC     | AD<br>AG | ST<br>SP | SQ     |
|  | FKW          | 18-60W A19 (1080W)  | 3-100W A21 (300W)   | 2       | PC     | AD<br>AG | ST<br>SP | SQ     |
| <b>JT3931U</b>   | DQN          | 43,600lm LED (258W) | 37,600lm LED (255W) | 2       | PC     | AD<br>AG | ST<br>SP | SQ     |
| <ul style="list-style-type: none"> <li>• W 53</li> <li>• HT 39</li> <li>• OAH 120<br/>(OverAll Height)</li> <li>• Y 3 @ 16"x33"</li> </ul> |              |                     |                     |         |        |          |          |        |
|  | DQO          | 69,300lm LED (436W) | 37,600lm LED (255W) | 2       | PC     | AD<br>AG | ST<br>SP | SQ     |
|  | DQP          | 88,700lm LED (575W) | 37,600lm LED (255W) | 2       | PC     | AD       | ST       | SQ     |

|  |     |                      |                     |   |    |          |          |    |
|--|-----|----------------------|---------------------|---|----|----------|----------|----|
|  | FKX | 18-60W A19 (1080W)   | 3-100W A21 (300W)   | 2 | PC | AD<br>AG | ST<br>SP | SQ |
| <b>JT4836U</b>   | GAB | 53,700lm LED (337W)  | 15,500lm LED (99W)  | 2 | PC | AD<br>AG | ST<br>SP | SQ |
| <ul style="list-style-type: none"> <li>• W 63</li> <li>• HT 44</li> <li>• OAH 120 (OverAll Height)</li> <li>• Y 3 @ 18"x38"</li> </ul> |     |                      |                     |   |    |          |          |    |
|  | GAC | 53,700lm LED (337W)  | 37,600lm LED (255W) | 2 | PC | AD<br>AG | ST<br>SP | SQ |
|  | FYV | 74,900lm LED (476W)  | 37,600lm LED (255W) | 2 | PC | AD<br>AG | ST<br>SP | SQ |
|  | FYW | 106,000lm LED (713W) | 37,600lm LED (255W) | 2 | PC | AD<br>AG | ST<br>SP | SQ |
|  | FKY | 27-60W A19 (1620W)   | 3-100W A21 (300W)   | 3 | PC | AD<br>AG | ST<br>SP | SQ |

SAMPLE CATALOG NUMBER

Model Number - Lamping Code - Finish - Mounting - Diffuser - Options

Scale

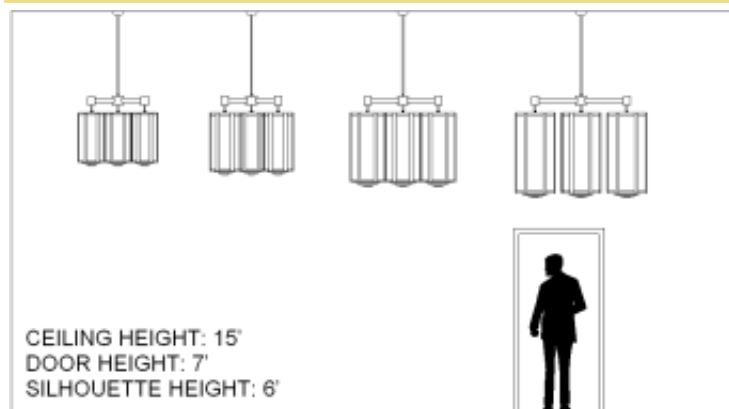

PRODUCT FEATURES

- Fabricated and welded metal housing
- Powder coated metallic finish
- UV stable, white acrylic diffuser (Standard)
- Optional specialty diffuser materials available
- Energy efficient LED lamping
- High power factor electronic LED driver
- Wired for dual circuit operation, Body Lamping and Down Lamping
- Standard LED CCT is 3000 Kelvin - contact us for alternate color temperature availability
- Standard LED CRI is 80 - contact us for alternate CRI availability
- Incandescent lamping is Triac or ELV dimmable - consult lamp and dimmer manufacturer for compatibility.
- Standard LED dimming is 0-10v
- Optional line voltage (Triac or ELV) LED dimming is available - consult for

Abbreviation Key

Lamps

- 60W A19 Medium Base, 60W Max, Incandesent or LED
- 100W A19 Medium Base, 100W Max, Incandesent or LED

Finish Types

- PC Powder Coat

Diffuser Types

- AD Standard Acrylic Diffuser
- AG Premium Glass Diffuser

Mountings

- ST Stem
- SP Steep Pitch Canopy for Stem

Louvers

- SQ Square Cell

Dimming Types

- 0 D1

- compatibility
  - Fixture is Chain or Stem hung (extra length may be added, specify OAH) (OAH - Over All Height - is the length from the ceiling to the bottom of the fixture.)
  - Mounts to standard electrical junction box (by others), Box requires additional structural support (by others)
  - For slopes greater than 35 degrees (from horizontal) order steep pitch adapter (Stem only)
  - UL / cUL or ETL / cETL listed
  - Contact Us for more lamping options.
- |   |    |
|---|----|
| 1 | D2 |
| 2 | D3 |