


Jamestown Series 6-Arm Satellite Pendant

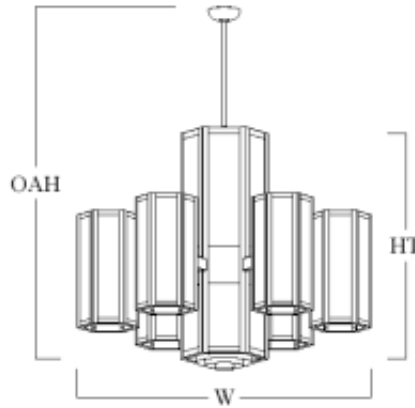

Model Number	Lamping Code	Body Lamping	Satellite Lamping	Down Lamping	Circuit	Finish	Diffuser	Mounting	Louver
JT4836A	EIB	0lm LED	12-60W A19 (720W)	1-26W PAR38 LED (26W)	3	PC	AD AG	ST CH SP	CR SQ
<ul style="list-style-type: none"> • W 48" • HT 36" • OAH 96" (OverAll Height) • X 1 @ 14"x36" • Y 6 @ 10"x20" 									
JT6045A	EIC	0lm LED	12-60W A19 (720W)	1-26W PAR38 LED (26W)	3	PC	AD AG	ST CH SP	CR SQ
<ul style="list-style-type: none"> • W 60" • HT 47" • OAH 120" (OverAll Height) • X 1 @ 16"x47" • Y 6 @ 12"x22" 									
JT7254A	EID	0lm LED	12-60W A19 (720W)	1-26W PAR38 LED (26W)	3	PC	AD AG	ST CH SP	CR SQ
<ul style="list-style-type: none"> • W 72" • HT 56" • OAH 120" (OverAll Height) • X 1 @ 18"x56" • Y 6 @ 14"x28" 									

SAMPLE CATALOG NUMBER


Model Number - Lamping Code - Finish - Mounting - Diffuser - Options

Scale

Abbreviation Key

Dimensions

W	Width
HT	Height
OAH	OverAll Height

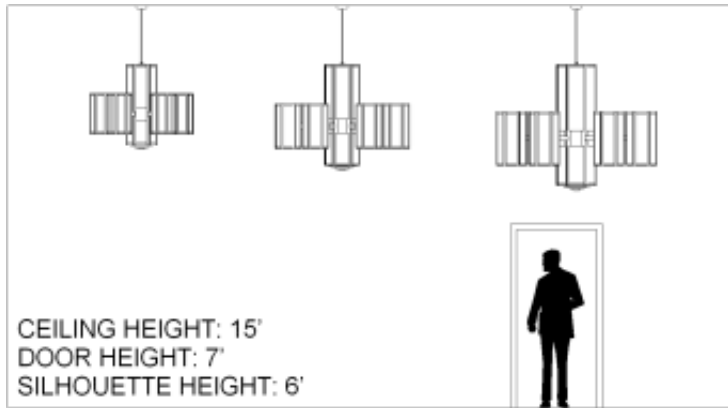

PRODUCT FEATURES

- Fabricated and welded metal housing
- Powder coated metallic finish
- UV stable, white acrylic diffuser (Standard)
- Optional specialty diffuser materials available
- Energy efficient LED or fluorescent lamping
- Wired for three circuit operation (Body Lamping/Down Lamping/Satellite Lamping)
- High power factor electronic ballast or LED driver
- Incandescent lamping is Triac or ELV dimmable - consult lamp and dimmer manufacturer for compatability.
- Optional dimming ballast 120V or 277V (LED or fluorescent lamping)
- Fixture may be Chain or Stem hung (extra length may be added, specify OAH) (OAH - Over All Height - is the length from the ceiling to the bottom of the fixture.)
- Mounts to standard 4" octagonal electrical junction box (by others), Box requires additional structural support (by others)
- For slopes greater than 35 degrees (from horizontal) order steep pitch adapter (Stem only)
- UL / cUL or ETL / cETL listed
- Contact Us for more lamping options.

X X-Dimension
Y Y-Dimension

Lamps

60W A19 Medium Base, 60W Max, Incandesent or LED
26W PAR38 LED 26W-LED PAR38, medium base

Finish Types

PC Powder Coat

Diffuser Types

AD Standard Acrylic Diffuser
AG Premium Glass Diffuser

Mountings

ST Stem
CH Chain
SP Steep Pitch Canopy for Stem

Louvers

CR Concentric Ring
SQ Square Cell