


Jamestown Series Ceiling Mount






Model Number	Lamping Code	Body Lamping	Circuit	Finish	Diffuser	Mounting	Louver
JT1207C	ABT	2-100W A21 (200W)	1	PC	WA AG	CC FM	SQ
• W 12" • HT 10"					AU	114	
JT1408C	GHB	5,400lm LED (33W)	1	PC	WA AG	CC FM	SQ
• W 14" • HT 11"							
	ABV	3-100W A21 (300W)	1	PC	WA AG	CC FM	SQ
JT1609C	GJK	5,400lm LED (33W)	1	PC	WA AG	CC FM	SQ
• W 16" • HT 12"							
	ABX	3-100W A21 (300W)	1	PC	WA AG	CC FM	SQ
JT1811C	GHD	5,400lm LED (33W)	1	PC	WA AG	CC FM	SQ
• W 18" • HT 14"					AG	1 141	
	ABZ	3-100W A21 (300W)	1	PC	WA AG	CC FM	SQ
	FXI	9,700lm LED (58W)	1	PC	WA	CC	SQ
• W 22" • HT 11"					AG	FM	
	GML	13,600lm LED (109W)	1	PC	WA AG	CC FM	SQ
	GEM	6-60W A19 (360W)	1	PC	WA AG	CC FM	SQ

Model Number - Lamping Code - Finish - Mounting - Diffuser - Options

Scale

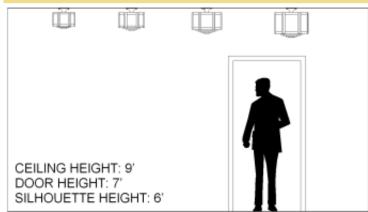

PRODUCT FEATURES

- · Fabricated and welded metal housing
- · Powder coated metallic finish
- UV stable, white acrylic diffuser (Standard)
- Optional specialty diffuser materials available
- Energy efficient LED lamping
- High power factor electronic LED driver
- Wired for single circuit operation, Body Lamping
- Standard LED CCT is 3000 Kelvin contact us for alternate color temperature availability
- Standard LED CRI is 80 contact us for alternate CRI availability
- Incandescent lamping is Triac or ELV dimmable consult lamp and dimmer manufacturer for compatibility.
- Standard LED dimming is 0-10v
- Optional line voltage (Triac or ELV) LED dimming is available consult for compatibility
- Mounts to standard electrical junction box (by others)
- UL / cUL or ETL / cETL listed
- Contact Us for more lamping options.

Abbreviation Key

Lamps

100W A21 Medium Base, 100W Max, Incandesent or LED 60W A19 Medium Base, 60W Max, Incandesent or LED

Finish Types

PC Powder Coat

Diffuser Types

WA Standard Acrylic Diffuser
AG Premium Glass Diffuser

Mountings

CC Ceiling Canopy
FM Flush Mount

Louvers

SQ Square Cell

Dimming Types

0 D1 1 D2