



Jamestown Series Short Pendant

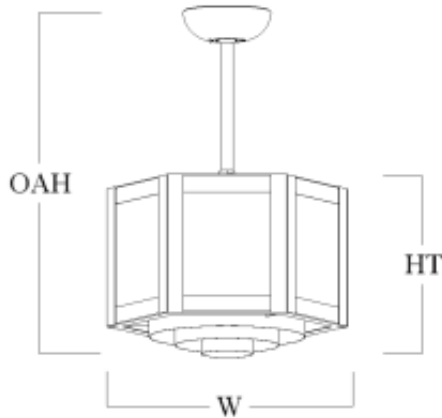

Model Number	Lamping Code	Body Lamping	Circuit	Finish	Diffuser	Mounting	Louver
JT1207P • W 12 • HT 9 • OAH 48 (OverAll Height)	ABL	2-100W A21 (200W)	1	PC	AD AG	ST CH SM SP	CR SQ
JT1408P • W 14 • HT 10 • OAH 48 (OverAll Height)	DTT	2,600lm LED (22W)	1	PC	AD AG	ST CH SM SP	CR SQ
	ABN	3-100W A21 (300W)	1	PC	AD AG	ST CH SM SP	CR SQ
JT1609P • W 16 • HT 11 • OAH 48 (OverAll Height)	DTU	3,800lm LED (31W)	1	PC	AD AG	ST CH SM SP	CR SQ
	ABP	3-100W A21 (300W)	1	PC	AD AG	ST CH SM SP	CR SQ
JT1811P • W 18 • HT 13 • OAH 48 (OverAll Height)	DTV	3,800lm LED (31W)	1	PC	AD AG	ST CH SM SP	CR SQ
	ABR	3-100W A21 (300W)	1	PC	AD AG	ST CH SM SP	CR SQ
JT2208P • W 22 • HT 8 • OAH 48 (OverAll Height)	ENE	8,500lm LED (53W)	1	PC	AD AG	ST CH SM SP	CR SQ
	ENF	13,900lm LED (106W)	1	PC	AD AG	ST CH SM SP	CR SQ

Scale

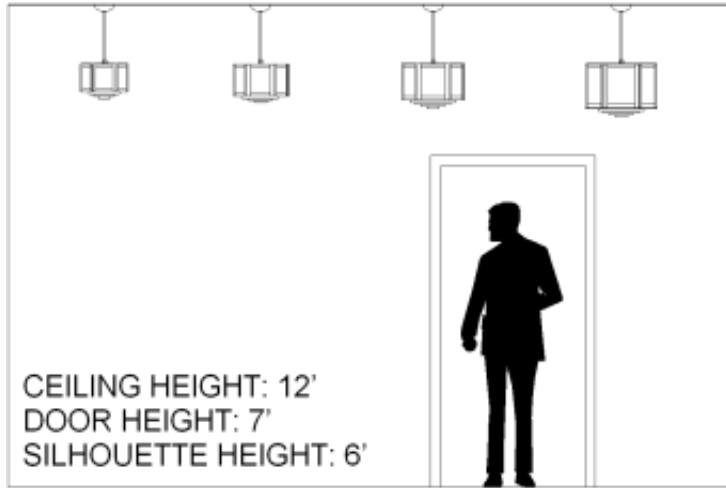

PRODUCT FEATURES

- Fabricated and welded metal housing
- Powder coated metallic finish
- UV stable, white acrylic diffuser (Standard)
- Optional specialty diffuser materials available
- Energy efficient LED or fluorescent lamping
- Wired for single circuit operation (Body Lamping)
- High power factor electronic ballast or LED driver
- Standard LED color temperature is 3000K with 80 CRI. Contact us for other color temperature or CRI options.
- Incandescent lamping is Triac or ELV dimmable - consult lamp and dimmer manufacturer for compatability.
- Optional dimming ballast 120V or 277V (LED or fluorescent lamping)
- Fixture may be Chain or Stem hung (extra length may be added, specify OAH) (OAH - Over All Height - is the length from the ceiling to the bottom of the fixture.)
- Mounts to standard 4" octagonal electrical junction box (by others)
- For slopes greater than 35 degrees (from horizontal) order steep pitch adapter (Stem only)
- UL / cUL or ETL / cETL listed
- Contact Us for more lamping options.

Abbreviation Key

Lamps

100W A21 Medium Base, 100W Max, Incandesent or LED

Finish Types

PC Powder Coat

Diffuser Types

AD Standard Acrylic Diffuser
 AG Premium Glass Diffuser

Mountings

ST Stem
 CH Chain
 SM Surface Mount Chain
 SP Steep Pitch Canopy for Stem

Louvers

CR Concentric Ring
 SQ Square Cell

Dimming

D1 LED 0-10v dimming options include integral 120-277v dimming drivers
 D2 LED Triac/ELV dimming options include integral 120v dimming drivers