


Jamestown Series Wall Bracket



Model Number	Lamping Code	Body Lamping	Circuit	Finish	Diffuser	Mounting	Louver	Options
JT0816B • W 8" • HT 16" • EXT 10"	DED	2,100lm LED (16W)	1	PC	WA AG	WM	SQ	E BL CN
	ACK	1-100W A21 (100W)	1	PC	WA AG	WM	SQ	E BL CN
JT1020B • W 10" • HT 20" • EXT 12"	DEE	3,100lm LED (22W)	1	PC	WA AG	WM	SQ	E BL CN
	ACM	1-100W A21 (100W)	1	PC	WA AG	WM	SQ	E BL CN
JT1224B • W 12" • HT 24" • EXT 14"	FEJ	4,500lm LED (33W)	1	PC	WA AG	WM	SQ	E BL CN
	FEI	1-100W A21 (100W)	1	PC	WA AG	WM	SQ	E BL CN
JT1426B • W 14" • HT 26" • EXT 16"	DEG	6,300lm LED (47W)	1	PC	WA AG	WM	SQ	E BL CN
	ACR	2-100W A21 (200W)	1	PC	WA AG	WM	SQ	E BL CN

SAMPLE CATALOG NUMBER
Model Number - Lamping Code - Finish - Mounting - Diffuser - Options

Scale	Abbreviation Key
	Lamps
100W A21	Medium Base, 100W Max, Incandesent or LED
	Finish Types
PC	Powder Coat
	Diffuser Types

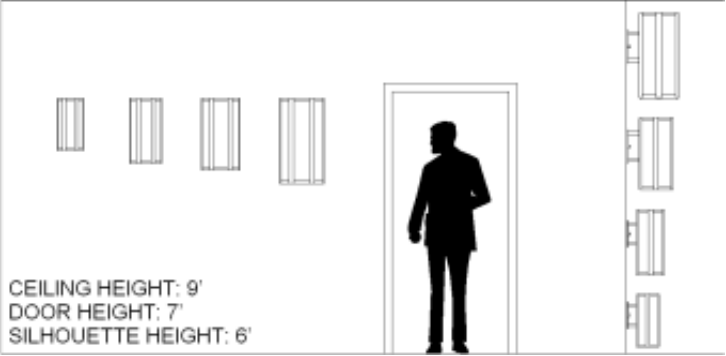

PRODUCT FEATURES

- Fabricated and welded metal housing
- Powder coated metallic finish
- UV stable, white acrylic diffuser (Standard)
- Optional specialty diffuser materials available
- Energy efficient LED lighting
- High power factor electronic LED driver
- Wired for single circuit operation, Body Lighting
- Standard LED CCT is 3000 Kelvin - contact us for alternate color temperature availability
- Standard LED CRI is 80 - contact us for alternate CRI availability
- Incandescent lighting is Triac or ELV dimmable - consult lamp and dimmer manufacturer for compatibility.
- Standard LED dimming is 0-10v
- Optional line voltage (Triac or ELV) LED dimming is available - consult for compatibility
- Mounts to standard electrical junction box (by others)
- UL / cUL or ETL / cETL listed
- Contact Us for more lighting options.

WA	Standard Acrylic Diffuser
AG	Premium Glass Diffuser

Mountings

WM	Wall Mount
----	------------

Louvers

SQ	Square Cell
----	-------------

Dimming Types

0	D1
1	D2

Options

E	Exterior
BL	Bottom Lens
CN	Cone Top (Exterior)