



Los Angeles Series Short Pendant

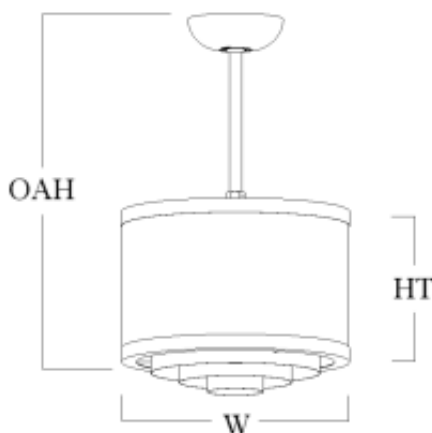

SAMPLE CATALOG NUMBER
Model Number - Lamping Code - Finish - Hanging - Diffuser - Options

| Model | Lamping Options | | Voltage | Circuit | Finish | Louver | Hanging | Diffuser | Options | Dimensions | |
|--------------|-----------------|-------------------|---------|---------|--------|--------|---------|----------|---------|------------|--------|
| Model Number | Lamping Code | Body Lamping | | | | | | | | W | HT |
| LA1007P | AHL | 2-F32TBX (74W) | 120/277 | 1 | PC | CR | CH | AC | DM | 11" | |
| | AHK | 2-100W-A21 (200W) | 120 | 1 | | SQ | SS | | | 7" | OAH 4' |
| LA1208P | DUD | 3,800lm LED (34W) | 120/277 | 1 | PC | CR | CH | AC | DM | 13" | |
| | AHN | 2-F42TBX (97W) | 120/277 | 1 | | SQ | SS | | | 8" | |
| | AHM | 3-100W-A21 (300W) | 120 | 1 | | | | | | 4" | OAH 4' |

Scale

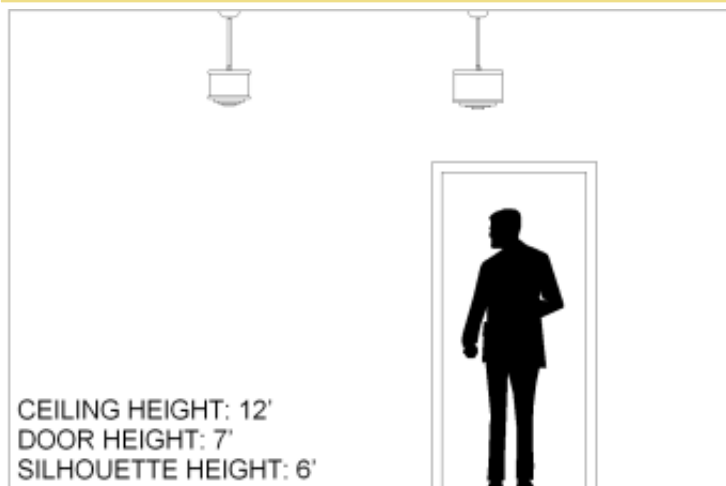

PRODUCT FEATURES

- Fabricated and welded metal housing
- Powder coated metallic finish
- UV stable, white acrylic diffuser (Standard)
- Optional specialty diffuser materials available
- Energy efficient LED or fluorescent lamping
- Wired for single circuit operation (Body Lamping)
- High power factor electronic ballast or LED driver
- Optional dimming ballast 120V or 277V (LED or fluorescent lamping)

Abbreviation Key

Dimensions

| | |
|-----|----------------|
| W | Width |
| HT | Height |
| OAH | OverAll Height |

Lamp Descriptions

| | |
|----------|---|
| 100W-A21 | Medium Base, 100W Max, Incandesent or LED |
| F32TBX | 32W triple biax, 4-PIN GX24q-3 base |
| F42TBX | 42W triple biax, 4-PIN GX24q-4 base |
| LED | 3000 Kelvin Warm White LED |

Finishes

| | |
|----|-------------|
| PC | Powder Coat |
|----|-------------|

Hanging Style

| | |
|----|-------------|
| SS | SINGLE STEM |
| CH | CHAIN |

Diffusers

- Fixture may be Chain or Stem hung (extra length may be added, specify OAH) (OAH - Over All Height - is the length from the ceiling to the bottom of the fixture.)
- Mounts to standard 4" octagonal electrical junction box (by others)
- For slopes greater than 35 degrees (from horizontal) order steep pitch adapter (Stem only)
- UL / cUL or ETL / cETL listed
- Contact Us for more lamping options.

AC White Acrylic Cylinder

Options

DM Dimming

Louver

CR CONCENTRIC RING (Not available on LED lamping)

SQ SQUARE CELL (Must be used on all LED lamping)