Circuit Finish Diffuser Mounting Louver Options



## Los Angeles Series Wall Bracket





		Code							
LA0	816B	AHZ	1-100W A21 (100W)	1	PC	WA	WM	SQ	BL
• W • H1 • EX									
LA1	.224B	FFX	5,400lm LED (33W)	1	PC	WA	WM	SQ	BL
• W	13	GBW	2-100W A21 (200W)	1	PC	WA	WM	SQ	BL

SQ

**Dimming Types** 

Square Cell


## SAMPLE CATALOG NUMBER

Model Number

• HT 24 • EXT 16

Model Number - Lamping Code - Finish - Mounting - Diffuser - Options

Lamping Body Lamping

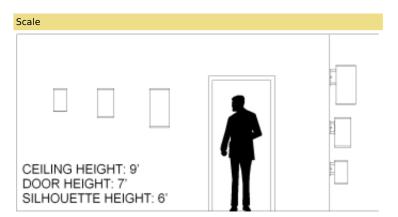

## PRODUCT FEATURES

- Fabricated and welded metal housing
- Powder coated metallic finish
- UV stable, white acrylic cylinder diffuser (Standard)
- Optional specialty diffuser materials available
- Energy efficient LED lamping
- High power factor electronic LED driver
- Wired for single circuit operation, Body Lamping
- Standard LED CCT is 3000 Kelvin contact us for alternate color temperature availability
- Standard LED CRI is 80 contact us for alternate CRI availability
- Incandescent lamping is Triac or ELV dimmable consult lamp and dimmer

## Abbreviation Key Lamps 100W A21 Medium Base, 100W Max, Incandesent or LED Finish Types PC Powder Coat Diffuser Types WA Standard Acrylic Diffuser Mountings WM Wall Mount Louvers

- manufacturer for compatibility.

  Standard LED dimming is 0-10v

  Optional line voltage (Triac or ELV) LED dimming is available consult for compatibility

  Mounts to standard electrical junction box (by others)

  UL / cUL or ETL / cETL listed

  Contact Us for more lamping options.

1 D3

Options

BL Bottom Lens