

# Craft Metal Products Inc.

## Lancaster Series 2-Tier Large Pendant





Model Number	Lamping Code	Gallery Lamping	Down Lamping	Circuit	Finish	Diffuser	Mounting	Louver
LC2412W • W 24 • HT 15 • OAH 48 (OverAll Height)	FYS	11,900lm LED (77W)		1	PC	WA AG	TC	SQ
	GLI	6-60W A19 (360W)	1-100W PAR38 (100W)	2	PC	WA AG	TC	SQ
• W 30	FYT	17,300lm LED (116W)		1	PC	WA AG	TC	SQ
• HT 17 • OAH 72 (OverAll Height)	GLJ	6-60W A19 (360W)	1-100W R40/Par38 (100W)	2	PC	WA AG	TC	SQ
LC3616W • W 36 • HT 19 • OAH 96 (OverAll Height)	DVJ	35,200lm LED (216W)	7,100lm LED (51W)	2	PC	WA AG	TC	SQ
	FWH	6-100W A21 (600W)	1-100W R40/Par38 (100W)	2	PC	WA AG	TC	SQ
• W 42 • HT 22 • OAH 96 (OverAll Height)	DZT	35,200lm LED (216W)	12,500lm LED (93W)	2	PC	WA AG	тс	SQ
	FWI	12-100W A21 (1200W)	1-100W R40/Par38 (100W)	2	PC	WA AG	TC	SQ
• W 54" • HT 22" • OAH 120" (OverAll Height)	DVL	42,200lm LED (260W)	12,500lm LED (93W)	2	PC	WA AG	тс	SQ
	FWJ	12-100W A21 (1200W)	1-100W R40/Par38 (100W)	2	PC	WA AG	ТС	SQ

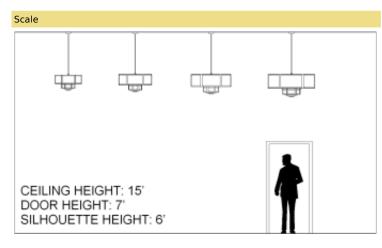

#### PRODUCT FEATURES

- Fabricated and welded metal housing
- Powder coated metallic finish
- UV stable, white acrylic diffuser (Standard)
- Optional specialty diffuser materials available
- Energy efficient LED lamping
- High power factor electronic LED driver
- Wired for dual circuit operation, Gallery Lamping and Down Lamping
- Standard LED CCT is 3000 Kelvin contact us for alternate color temperature availability
- Standard LED CRI is 80 contact us for alternate CRI availability Incandescent lamping is Triac or ELV dimmable - consult lamp and dimmer
- manufacturer for compatibility. • Standard LED dimming is 0-10v
- Optional line voltage (Triac or ELV) LED dimming is available consult for compatibility
- Fixture is Chain or Stem hung (extra length may be added, specify OAH) (OAH -Over All Height - is the length from the ceiling to the bottom of the fixture.)
- Mounts to standard electrical junction box (by others), Box requires additional structural support (by others)
- · For slopes greater than 35 degrees (from horizontal) order steep pitch adapter (Stem only)
- UL / cUL or ETL / cETL listed
- · Contact Us for more lamping options.

## Abbreviation Key Lamps 60W A19 Medium Base, 60W Max, Incandesent or LED 100W PAR38 Medium Base, 100W Max, Incandesent or LED **Finish Types** PC Powder Coat

Diffuser Types	
WA	Standard Acrylic Diffuser
AG	Premium Glass Diffuser

## Mountings

ΤС

Triple Chain Spreader

### Louvers

Square Cell SQ

Dimming Types							
0	D1						
1	D2						
2	D3						