



Lafayette Series 3 Tier Large Pendant

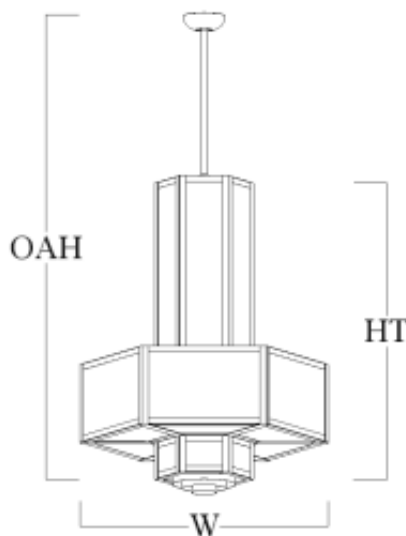

SAMPLE CATALOG NUMBER
Model Number - Lamping Code - Finish - Hanging - Diffuser - Options

Model	Lamping Options													
Model Number	Lamping Code	Body Lamping	Body2 Lamping	Gallery Lamping	Down Lamping	Gallery Down Lamping	Voltage	Circuit	Finish	Louver	Hanging	Diffuser	Options	Dimension
LF3036H	ADC	3-100W-A21 (300W)		6-150W-A21 (900W)	1-300W-R40 (300W)		120	3	PC	CR	CH SS	AD AG	DM LOGO SBL	W HT OAH
LF3642H	DVO DIO	12,700lm LED (83W) 6-100W-A21 (600W)	2,600lm LED (16W)	28,400lm LED (220W) 6-200W-A21 (1200W)	7,000lm LED (53W) 1-300W-R40 (300W)		120/277 120	2 3	PC	CR	CH SS	AD AG	DM LOGO SBL	W HT OAH
LF4249H	EAU DIP	12,700lm LED (83W) 6-100W-A21 (600W)	2,600lm LED (16W)	28,400lm LED (220W) 6-300W-PS25 (1800W)	12,000lm LED (100W) 1-300W-R40 (300W)		120/277 120	2 4	PC	CR	CH SS	AD AG	DM LOGO SBL	W HT OAH
LF4862H	EIM EIP	12,700lm LED (83W) 6-100W-A21 (600W)	2,600lm LED (16W)	28,400lm LED (220W) 6-300W-PS25 (1800W)	12,000lm LED (100W) 1-300W-R40 (300W)		120/277 120	2 3	PC	CR	CH SS	AD AG	DM LOGO SBL	W HT OAH
LF5460H	DVR EIN	23,500lm LED (142W) 6-100W-A21 (600W)	4,600lm LED (32W)	32,900lm LED (256W) 6-300W-PS25 (1800W)	12,000lm LED (100W) 1-300W-R40 (300W)	42,000lm LED (317W)	120/277 120	2 3	PC	CR	CH SS	AD AG	DM LOGO SBL	W HT OAH

Scale

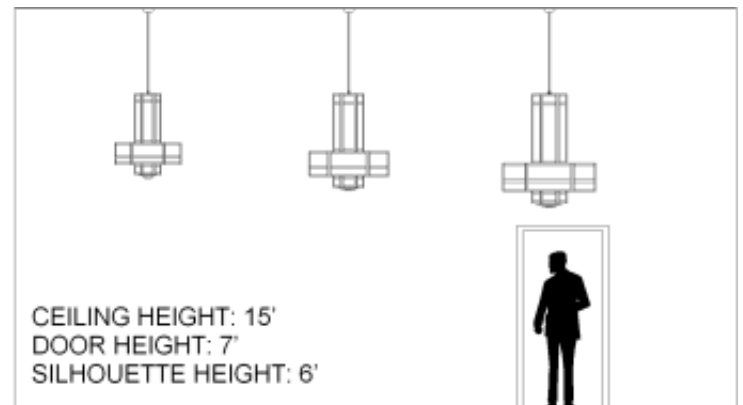

Abbreviation Key

Dimensions

- W Width
- HT Height
- OAH OverAll Height

Lamp Descriptions

- 100W-A21 Medium Base, 100W Max, Incandesent or LED
- 150W-A21 150W A21, medium base
- 200W-A21 200W A21, medium base
- 300W-R40 300W R40, medium base

PRODUCT FEATURES

- Fabricated and welded metal housing
- Powder coated metallic finish
- UV stable, white acrylic diffuser (Standard)
- Optional specialty diffuser materials available
- Energy efficient LED or fluorescent lamping
- Wired for three circuit operation (Body Lamping/Gallery Lamping/Down Lamping)
- High power factor electronic ballast or LED driver
- Optional dimming ballast 120V or 277V (LED or fluorescent lamping)
- Fixture may be Chain or Stem hung (extra length may be added, specify OAH) (OAH - Over All Height - is the length from the ceiling to the bottom of the fixture.)
- Mounts to standard 4" octagonal electrical junction box (by others), Box requires additional structural support (by others)
- For slopes greater than 35 degrees (from horizontal) order steep pitch adapter (Stem only)
- UL / cUL or ETL / cETL listed
- Contact Us for more lamping options.

300W-PS25 300W PS25, medium base
LED 3000 Kelvin Warm White LED

Finishes

PC Powder Coat

Hanging Style

SS SINGLE STEM

CH CHAIN

Diffusers

AD Acrylic (White Acrylic Standard)

AG Art Glass

Options

DM Dimming

SBL Symbol

LOGO Custom Logo

Louver

CR CONCENTRIC RING (Not available on LED lamping)