




Lafayette Series Ceiling Mount

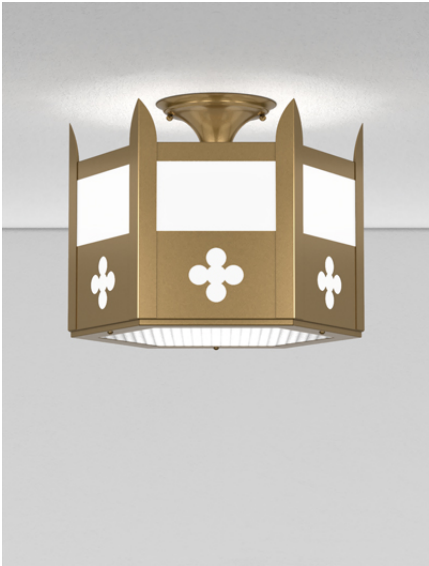

Model Number	Lamping Code	Body Lamping	Circuit	Finish	Diffuser	Mounting	Louver
LF1207C	ABT	2-100W A21 (200W)	1	PC	WA AG	CC FM	SQ
	• W 12" • HT 10"						
LF1408C	GHB	5,400lm LED (33W)	1	PC	WA AG	CC FM	SQ
	• W 14" • HT 11"						
	ABV	3-100W A21 (300W)	1	PC	WA AG	CC FM	SQ
LF1609C	GJK	5,400lm LED (33W)	1	PC	WA AG	CC FM	SQ
	• W 16" • HT 12"						
	ABX	3-100W A21 (300W)	1	PC	WA AG	CC FM	SQ
LF1811C	GHD	5,400lm LED (33W)	1	PC	WA AG	CC FM	SQ
	• W 18" • HT 14"						
	ABZ	3-100W A21 (300W)	1	PC	WA AG	CC FM	SQ
LF2208C	FXI	9,700lm LED (58W)	1	PC	WA AG	CC FM	SQ
	• W 22" • HT 11"						
	GML	13,600lm LED (109W)	1	PC	WA AG	CC FM	SQ
	GEM	6-60W A19 (360W)	1	PC	WA AG	CC FM	SQ

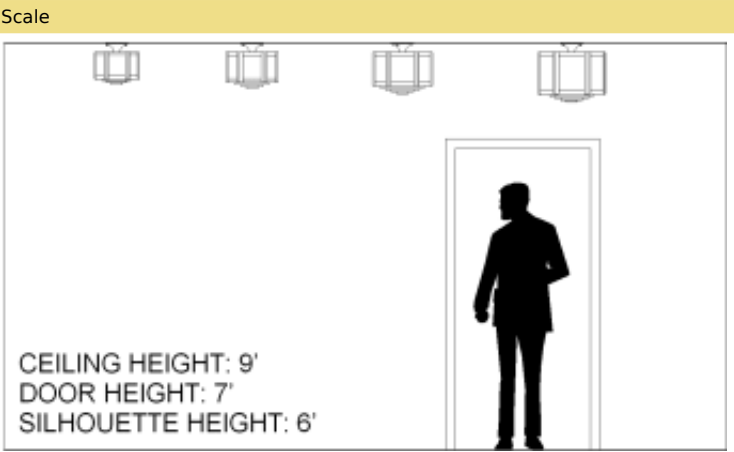

- PRODUCT FEATURES
- Fabricated and welded metal housing
 - Powder coated metallic finish
 - UV stable, white acrylic diffuser (Standard)
 - Optional specialty diffuser materials available
 - Energy efficient LED lamping
 - High power factor electronic LED driver
 - Wired for single circuit operation, Body Lamping
 - Standard LED CCT is 3000 Kelvin - contact us for alternate color temperature availability
 - Standard LED CRI is 80 - contact us for alternate CRI availability
 - Incandescent lamping is Triac or ELV dimmable - consult lamp and dimmer manufacturer for compatibility.
 - Standard LED dimming is 0-10v
 - Optional line voltage (Triac or ELV) LED dimming is available - consult for compatibility
 - Mounts to standard electrical junction box (by others)
 - UL / cUL or ETL / cETL listed
 - Contact Us for more lamping options.

Abbreviation Key	
Lamps	
100W A21	Medium Base, 100W Max, Incandesent or LED
60W A19	Medium Base, 60W Max, Incandesent or LED
Finish Types	
PC	Powder Coat
Diffuser Types	
WA	Standard Acrylic Diffuser
AG	Premium Glass Diffuser
Mountings	
CC	Ceiling Canopy
FM	Flush Mount
Louvers	
SQ	Square Cell
Dimming Types	
0	D1
1	D2