


A 3D rendering of a brass chandelier. The fixture consists of a small, dome-shaped canopy at the top, connected by a chain of rectangular links to a large, ornate crown-shaped body. The crown has multiple points and decorative cutouts. The entire fixture is rendered in a metallic brass finish and is shown hanging against a plain, light-colored background.

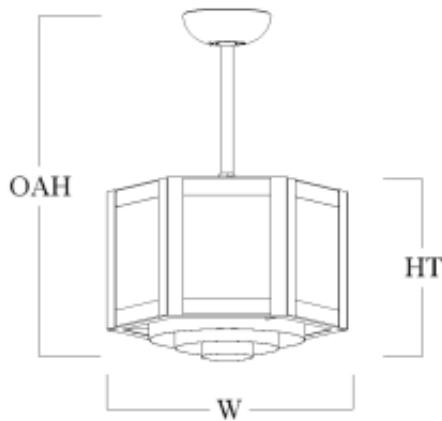

Model Number	Lamping Code	Body Lamping	Circuit	Finish	Diffuser	Mounting	Louver
LF1207P • W 12 • HT 10 • OAH 48 (OverAll Height)	ABL	2-100W A21 (200W)	1	PC	WA AG	ST CH SM SP	SQ
LF1408P • W 14 • HT 13 • OAH 48 (OverAll Height)	GGP	5,400lm LED (33W)	1	PC	WA AG	ST CH SM SP	SQ
	ABN	3-100W A21 (300W)	1	PC	WA AG	ST CH SM SP	SQ
LF1609P • W 16 • HT 14 • OAH 48 (OverAll Height)	GGS	5,400lm LED (33W)	1	PC	WA AG	ST CH SM SP	SQ
	ABP	3-100W A21 (300W)	1	PC	WA AG	ST CH SM SP	SQ
LF1610P • W 16 • HT 14 • OAH 48 (OverAll Height)	GKP	5,400lm LED (33W)	1	PC	WA AG	ST CH SM SP	SQ
	GKO	3-100W A21 (300W)	1	PC	WA AG	ST CH SM SP	SQ
LF1811P • W 18 • HT 17 • OAH 48 (OverAll Height)	GGT	5,400lm LED (33W)	1	PC	WA AG	ST CH SM SP	SQ
	ABR	3-100W A21 (300W)	1	PC	WA AG	ST CH SM SP	SQ
LF2208P • W 22 • HT 13	ENE	9,700lm LED (58W)	1	PC	WA AG	ST CH SM SP	SQ


• OAH 48
(OverAll Height)

ENF	15,800lm LED (116W)	1	PC	WA AG	ST CH SM SP	SQ
GIT	6-60W A19 (360W)	1	PC	WA AG	ST CH SM SP	SQ

SAMPLE CATALOG NUMBER

Model Number - Lamping Code - Finish - Mounting - Diffuser - Options

Scale

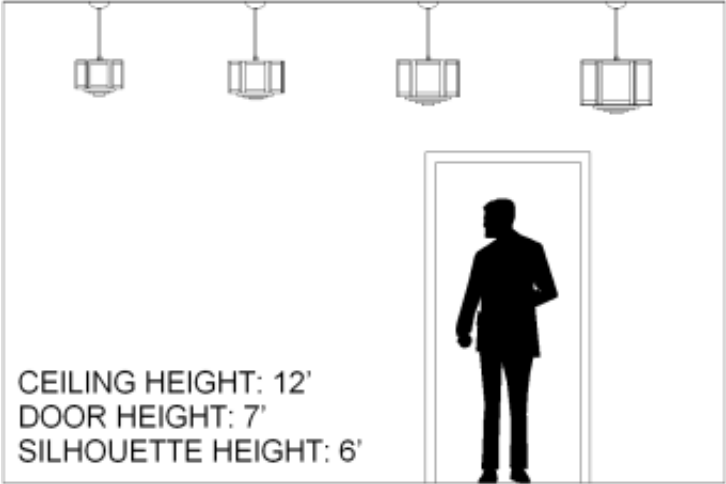

PRODUCT FEATURES

- Fabricated and welded metal housing
- Powder coated metallic finish
- UV stable, white acrylic diffuser (Standard)
- Optional specialty diffuser materials available
- Energy efficient LED lamping
- High power factor electronic LED driver
- Wired for dual circuit operation, Body Lamping and Down Lamping
- Standard LED CCT is 3000 Kelvin - contact us for alternate color temperature availability
- Standard LED CRI is 80 - contact us for alternate CRI availability
- Incandescent lamping is Triac or ELV dimmable - consult lamp and dimmer manufacturer for compatibility.
- Standard LED dimming is 0-10v
- Optional line voltage (Triac or ELV) LED dimming is available - consult for compatibility
- Fixture is Chain or Stem hung (extra length may be added, specify OAH) (OAH - Over All Height - is the length from the ceiling to the bottom of the fixture.)
- Mounts to standard electrical junction box (by others), Box may require additional structural support (by others)
- For slopes greater than 35 degrees (from horizontal) order steep pitch adapter (Stem only)
- UL / cUL or ETL / cETL listed
- Contact Us for more lamping options.

Abbreviation Key

Lamps

100W A21	Medium Base, 100W Max, Incandesent or LED
60W A19	Medium Base, 60W Max, Incandesent or LED

Finish Types

PC	Powder Coat
----	-------------

Diffuser Types

WA	Standard Acrylic Diffuser
AG	Premium Glass Diffuser

Mountings

ST	Stem
CH	Chain
SM	Surface Mount Chain
SP	Steep Pitch Canopy for Stem

Louvers

SQ	Square Cell
----	-------------

Dimming Types

0	D1
1	D2
2	D3