
Craft Metal Products Inc.

Lafayette Series Wall Sconce





Model Number	Lamping Code	Body Lamping	Circuit	Finish	Diffuser	Mounting	Louver	Options
LF0816S • W 8 • HT 18 • EXT 4	DYD	1,000lm LED (5W)	1	PC	WA AG	WM	BD	BL
	DYE	2,200lm LED (14W)	1	PC	WA AG	WM	BD	BL
	ACB	1-60W A19 (60W)	1	PC	WA AG	WM	BD	BL
LF1020S	DYF	2,200lm LED (14W)	1	PC	WA AG	WM	BD	BL
• W 10 • HT 22 • EXT 5	DYG	3,800lm LED (22W)	1	PC	WA AG	WM	BD	BL
	ACD	2-100W A21 (200W)	1	PC	WA AG	WM	BD	BL
• W 12 • HT 26 • EXT 6	FEC	6,300lm LED (40W)	1	PC	WA AG	WM	BD	BL
	FED	7,100lm LED (44W)	1	PC	WA AG	WM	BD	BL
	FEB	3-100W A21 (300W)	1	PC	WA AG	WM	BD	BL
LF1426S • W 14 • HT 29 • EXT 7	DDT	6,300lm LED (40W)	1	PC	WA AG	WM	BD	BL
	DYJ	8,200lm LED (53W)	1	PC	WA AG	WM	BD	BL
	GBM	4-60W A19 (240W)	1	PC	WA AG	WM	BD	BL
	ACI	3-100W A21 (300W)	1	PC	WA AG	WM	BD	BL


SAMPLE CATALOG NUMBER

Model Number - Lamping Code - Finish - Mounting - Diffuser - Options

Scale

Abbreviation Key

Lamps	
60W A19	Medium Base, 60W Max, Incandesent or LED
100W A21	Medium Base, 100W Max, Incandesent or LED

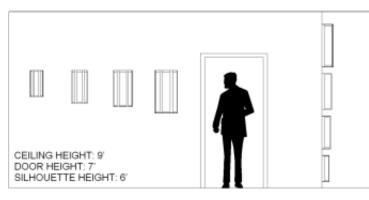

PRODUCT FEATURES

- Fabricated and welded metal housing

- Fabricated and weided metal nousing
 Powder coated metallic finish
 UV stable, white acrylic diffuser (Standard)
 Optional specialty diffuser materials available
 Energy efficient LED lamping
 High power factor electronic LED driver
 Wired for single circuit operation, Body Lamping
 Standard LED CCT is 3000 Kelvin contact us for alternate color temperature availability availability
- Standard LED CRI is 80 contact us for alternate CRI availability
 Incandescent lamping is Triac or ELV dimmable consult lamp and dimmer manufacturer for compatibility.
- Standard LED dimming is 0-10v
- Optional line voltage (Triac or ELV) LED dimming is available consult for compatibility
- Mounts to standard electrical junction box (by others)
- UL / cUL or ETL / cETL listed
- Contact Us for more lamping options.

Finish Types				
PC	Powder Coat			
Diffuser Types				
WA	Standard Acrylic Diffuser			
AG	Premium Glass Diffuser			
Mountings				
WM	Wall Mount			
Louvers				

Dimming	Types
0	D1
1	D2
Options	

Bottom Perf Door

BD

options	
BL	Bottom Lens
BD	Bottom Door