



## **Norwich Series 2-Tier Large Pendant**





Model Number	Lamping Code	Gallery Lamping	Down Lamping	Circuit	Finish	Diffuser	Mounting	Louver
NW2412W  • W 24  • HT 16  • OAH 48  (OverAll Height)	GFK	11,900lm LED (77W)		1	PC	WA AG	TC	SQ
	GLK	6-60W A19 (360W)	1-100W R40/Par38 (100W)	2	PC	WA AG	TC	SQ
NW3014W  • W 30 • HT 19	GFP	18,700lm LED (135W)		1	PC	WA AG	TC	SQ
• OAH 72 (OverAll Height)	GLL	6-60W A19 (360W)	1-100W R40/Par38 (100W)	2	PC	WA AG	TC	SQ
• W 36 • HT 22 • OAH 96 (OverAll Height)	DWC	35,200lm LED (216W)	7,100lm LED (51W)	2	PC	WA AG	TC	SQ
	DJP	6-100W A21 (600W)	1-100W R40/Par38 (100W)	2	PC	WA AG	TC	SQ
NW4218W  • W 42 • HT 25	DWF	35,200lm LED (216W)	12,500lm LED (93W)	2	PC	WA AG	TC	SQ
• OAH 96 (OverAll Height)	DJQ	12-100W A21 (1200W)	1-100W R40/Par38 (100W)	2	PC	WA AG	TC	SQ
NW5422W  • W 54 • HT 30	EYG	42,200lm LED (260W)	12,500lm LED (93W)	2	PC	WA AG	TC	SQ
• OAH 120 (OverAll Height)	EYJ	12-100W A21 (1200W)	1-100W R40/Par38 (100W)	2	PC	WA AG	TC	SQ

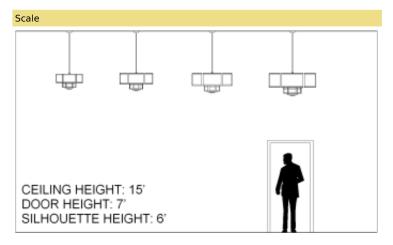

## PRODUCT FEATURES

- Fabricated and welded metal housing
- Powder coated metallic finish
- UV stable, white acrylic diffuser (Standard)
- · Optional specialty diffuser materials available
- Energy efficient LED lamping
- High power factor electronic LED driver
- Wired for dual circuit operation, Gallery Lamping and Down Lamping
- Standard LED CCT is 3000 Kelvin contact us for alternate color temperature availability
- Standard LED CRI is 80 contact us for alternate CRI availability
- Incandescent lamping is Triac or ELV dimmable consult lamp and dimmer manufacturer for compatibility.
- Standard LED dimming is 0-10v
- Optional line voltage (Triac or ELV) LED dimming is available consult for compatibility
- Fixture is Chain or Stem hung (extra length may be added, specify OAH) (OAH -Over All Height - is the length from the ceiling to the bottom of the fixture.)
- Mounts to standard electrical junction box (by others), Box requires additional structural support (by others)
- For slopes greater than 35 degrees (from horizontal) order steep pitch adapter (Stem only)
- UL / cUL or ETL / cETL listed
- Contact Us for more lamping options.

## Abbreviation Key

Lamps

60W A19 Medium Base, 60W Max, Incandesent or LED

100W R40/Par38

Medium Base, 100W Max, Incandesent or LED

Finish Types

PC Powder Coat

**Diffuser Types** 

WA Standard Acrylic Diffuser
AG Premium Glass Diffuser

Mountings

TC Triple Chain Spreader

Louvers

SQ Square Cell

**Dimming Types** 

D1