

Norwich Series Ceiling Mount






Model Number	Lamping Code	Body Lamping		Circuit	Finish	Diffuser	Mounting	Louve
NW1207C	AMY		2-100W A21 (200W)	1	PC	WA AG	СС	SQ
• W 12 • HT 11						AG		
NW1408C	ANA		3-100W A21 (300W)	1	PC	WA AG	СС	SQ
• W 14 • HT 13						AG		
NW1609C	GFC		5,400lm LED (33W)	1	PC	WA AG	СС	SQ
• W 16 • HT 14						110		
	ANC		3-100W A21 (300W)	1	PC	WA AG	CC	SQ
NW1811C	GFD		5,400lm LED (33W)	1	PC	WA	CC	SQ
• W 18 • HT 17						AG		
	ANE		3-100W A21 (300W)	1	PC	WA AG	CC	SQ
NW2208C	FYA		9,700lm LED (58W)	1	PC	WA AG	CC	SQ
• W 22 • HT 12								

SAMPLE CATALOG NUMBER

Scale

Model Number - Lamping Code - Finish - Mounting - Diffuser - Options

Abbreviatio	Кеу
Lamps	
100W A21	Medium Base, 100W Max, Incandesent or LED

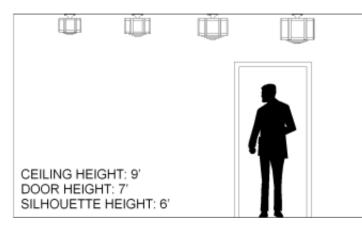

PRODUCT FEATURES

- · Fabricated and welded metal housing
- · Powder coated metallic finish
- UV stable, white acrylic diffuser (Standard)
- Optional specialty diffuser materials available
- Energy efficient LED lamping
 High power factor electronic LED driver
- Wired for single circuit operation, Body Lamping • Standard LED CCT is 3000 Kelvin - contact us for alternate color temperature availability
- Standard LED CRI is 80 contact us for alternate CRI availability
- Incandescent lamping is Triac or ELV dimmable consult lamp and dimmer manufacturer for compatibility.
- Standard LED dimming is 0-10v
- Optional line voltage (Triac or ELV) LED dimming is available consult for compatibility
- Mounts to standard electrical junction box (by others)
- UL / cUL or ETL / cETL listed
- Contact Us for more lamping options.

Finish Types			
PC	Powder Coat		
Diffuser Types			
WA	Standard Acrylic Diffuser		
AG	Premium Glass Diffuser		
Mountings			
СС	Ceiling Canopy		
Louvers			
SQ	Square Cell		
Dimming Types	5		

0

1

D2 D1