


A tall, slender, gold-colored pendant light fixture. It features a chain of rectangular links and a cage-like structure with pointed, gothic-style arches at the top and bottom. The interior of the cage is illuminated, creating a warm glow.

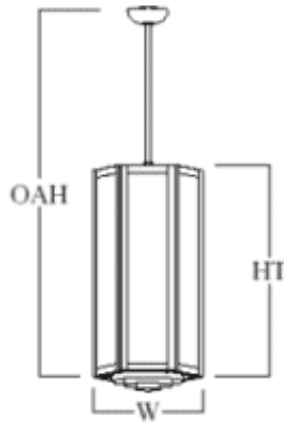

Model Number	Lamping Code	Body Lamping	Down Lamping	Circuit	Finish	Diffuser	Mounting	Louver
NW1224L • W 12 • HT 30 • OAH 72 (OverAll Height)	GEL	4-60W A19 (240W)	1-100W PAR38 (100W)	2	PC	WA AG	ST CH SM SP	SQ
NW1426L • W 14 • HT 32 • OAH 96 (OverAll Height)	DNT	14,500lm LED (86W)	7,100lm LED (51W)	2	PC	WA AG	ST CH SM SP	SQ
	DNU	14,500lm LED (86W)	12,500lm LED (93W)	2	PC	WA AG	ST CH SM SP	SQ
	DNW	23,100lm LED (146W)	12,500lm LED (93W)	2	PC	WA AG	ST CH SM SP	SQ
	FIP	6-60W A19 (360W)	1-100W PAR38 (100W)	2	PC	WA AG	ST CH SM SP	SQ
NW1631L • W 16 • HT 37 • OAH 96 (OverAll Height)	DOU	14,500lm LED (86W)	12,500lm LED (93W)	2	PC	WA AG	ST CH SM SP	SQ
	DMB	23,100lm LED (146W)	12,500lm LED (93W)	2	PC	WA AG	ST CH SM SP	SQ
	DGD	29,500lm LED (192W)	12,500lm LED (93W)	2	PC	WA AG	ST CH SM SP	SQ
	FLP	6-60W A19 (360W)	1-100W PAR38 (100W)	2	PC	WA AG	ST CH SM SP	SQ
NW1836L • W 18 • HT 42	FZV	24,900lm LED (146W)	12,500lm LED (93W)	2	PC	WA AG	ST CH SM SP	SQ

• OAH 120 (OverAll Height)	FZW	35,300lm LED (238W)	12,500lm LED (93W)	2	PC	WA AG	ST CH SM SP	SQ
	FIS	9-60W A19 (540W)	1-100W PAR38 (100W)	2	PC	WA AG	ST CH SM SP	SQ
NW2242L • W 22 • HT 50 • OAH 120 (OverAll Height)	GLA	31,000lm LED (185W)	12,500lm LED (93W)	2	PC	WA AG	ST CH SM SP	SQ
	FIU	9-60W A19 (540W)	1-100W PAR38 (100W)	2	PC	WA AG	ST CH SM SP	SQ

SAMPLE CATALOG NUMBER
Model Number - Lamping Code - Finish - Mounting - Diffuser - Options

Scale

CEILING HEIGHT: 15'
DOOR HEIGHT: 7'
SILHOUETTE HEIGHT: 6'

PRODUCT FEATURES

- Fabricated and welded metal housing
- Powder coated metallic finish
- UV stable, white acrylic diffuser (Standard)
- Optional specialty diffuser materials available
- Energy efficient LED lamping
- High power factor electronic LED driver
- Wired for dual circuit operation, Body Lamping and Down Lamping
- Standard LED CCT is 3000 Kelvin - contact us for alternate color temperature availability
- Standard LED CRI is 80 - contact us for alternate CRI availability
- Incandescent lamping is Triac or ELV dimmable - consult lamp and dimmer manufacturer for compatibility.
- Standard LED dimming is 0-10v
- Optional line voltage (Triac or ELV) LED dimming is available - consult for compatibility
- Fixture is Chain or Stem hung (extra length may be added, specify OAH) (OAH - Over All Height - is the length from the ceiling to the bottom of the fixture.)
- Mounts to standard electrical junction box (by others), Box may require additional structural support (by others)
- For slopes greater than 35 degrees (from horizontal) order steep pitch adapter (Stem only)
- UL / cUL or ETL / cETL listed
- Contact Us for more lamping options.

Abbreviation Key

Lamps

- 60W A19 Medium Base, 60W Max, Incandesent or LED
- 100W PAR38 Medium Base, 100W Max, Incandesent or LED

Finish Types

- PC Powder Coat

Diffuser Types

- WA Standard Acrylic Diffuser
- AG Premium Glass Diffuser

Mountings

- ST Stem
- CH Chain
- SM Surface Mount Chain
- SP Steep Pitch Canopy for Stem

Louvers

- SQ Square Cell

Dimming Types

- 0 D1
- 1 D2
- 2 D3