


## Norwich Series Pendant

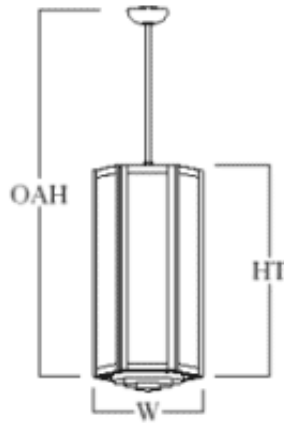

Model Number	Lamping Code	Body Lamping	Down Lamping	Circuit	Finish	Diffuser	Mounting	Louver
<b>NW1222L</b>	ALI	3-100W A21 (300W)	1-300W R40 (300W)	2	PC	AD AG	ST CH SM SP	CR SQ
<ul style="list-style-type: none"> <li>• W 12"</li> <li>• HT 27"</li> <li>• OAH 6' (OverAll Height)</li> </ul>								
<b>NW1426L</b>	DNT	14,500lm LED (88W)	7,000lm LED (47W)	2	PC	AD AG	ST CH SM SP	CR SQ
<ul style="list-style-type: none"> <li>• W 14"</li> <li>• HT 32"</li> <li>• OAH 8' (OverAll Height)</li> </ul>								
	DNU	14,500lm LED (88W)	12,000lm LED (100W)	2	PC	AD AG	ST CH SM SP	CR SQ
	DNW	23,100lm LED (146W)	12,000lm LED (100W)	2	PC	AD AG	ST CH SM SP	CR SQ
	DHN	6-100W A21 (600W)	1-300W R40 (300W)	2	PC	AD AG	ST CH SM SP	CR SQ
<b>NW1631L</b>	DOU	14,500lm LED (88W)	12,000lm LED (100W)	2	PC	AD AG	ST CH SM SP	CR SQ
<ul style="list-style-type: none"> <li>• W 16"</li> <li>• HT 37"</li> <li>• OAH 8' (OverAll Height)</li> </ul>								
	DMB	23,100lm LED (146W)	12,000lm LED (100W)	2	PC	AD AG	ST CH SM SP	CR SQ
	DGD	29,500lm LED (194W)	12,000lm LED (100W)	2	PC	AD AG	ST CH SM SP	CR SQ
	DHO	6-100W A21 (600W)	1-300W R40 (300W)	2	PC	AD AG	ST CH SM SP	CR SQ
<b>NW1836L</b>	DGE	23,500lm LED (131W)	12,000lm LED (100W)	2	PC	AD AG	ST CH SM SP	CR SQ
<ul style="list-style-type: none"> <li>• W 18"</li> <li>• HT 42"</li> </ul>								

• OAH 10' (OverAll Height)	DNX	37,400lm LED (218W)	12,000lm LED (100W)	2	PC	AD AG	ST CH SM SP	CR SQ
	DHP	9-100W A21 (900W)	1-300W R40 (300W)	2	PC	AD AG	ST CH SM SP	CR SQ
<b>NW2242L</b>	FCB	9-100W A21 (900W)	1-300W R40 (300W)	3	PC	AD AG	ST CH SM SP	CR SQ
<ul style="list-style-type: none"> <li>• W 22"</li> <li>• HT 50"</li> <li>• OAH 10' (OverAll Height)</li> </ul>								

#### SAMPLE CATALOG NUMBER

**Model Number - Lamping Code - Finish - Mounting - Diffuser - Options**

#### PRODUCT FEATURES

- Fabricated and welded metal housing
- Powder coated metallic finish
- UV stable, white acrylic diffuser (Standard)
- Optional specialty diffuser materials available
- Energy efficient LED or fluorescent lamping
- Wired for dual circuit operation (Body Lamping/Down Lamping)
- High power factor electronic ballast or LED driver
- Incandescent lamping is Triac or ELV dimmable - consult lamp and dimmer manufacturer for compatability.
- Optional dimming ballast 120V or 277V (LED or fluorescent lamping)
- Fixture is Chain or Stem hung (extra length may be added, specify OAH) (OAH - Over All Height - is the length from the ceiling to the bottom of the fixture.)
- Mounts to standard electrical junction box (by others), Box may require additional structural support (by others)
- For slopes greater than 35 degrees (from horizontal) order steep pitch adapter (Stem only)
- UL / cUL or ETL / cETL listed
- Contact Us for more lamping options.

#### Abbreviation Key

#### Dimensions

W	Width
HT	Height
OAH	OverAll Height

#### Lamps

100W A21	Medium Base, 100W Max, Incandesent or LED
300W R40	300W R40, medium base

#### Finish Types

PC	Powder Coat
----	-------------

#### Diffuser Types

AD	Standard Acrylic Diffuser
AG	Premium Glass Diffuser

#### Mountings

ST	Stem
CH	Chain
SM	Surface Mount Chain
SP	Steep Pitch Canopy for Stem

#### Louvers

CR	Concentric Ring
SQ	Square Cell

#### Options

D1	LED 0-10V low voltage control dimming
----	---------------------------------------