
# **Oxford Series 6-Arm Satellite Pendant**





Model Number	Lamping Code	Body Lamping	Satellite Lamping	Down Lamping	Circuit	Finish	Diffuser	Mounting	Louver
• W 48 • HT 39 • OAH 96 (OverAll Height) • X 1 @ 14"x39" • Y 6 @ 10"x22"	EIB	5-60W A19 (300W)	12-60W A19 (720W)	1-26W PAR38 LED (26W)	3	PC	WA AG	ST CH TC SP	SQ
• W 60 • HT 48 • OAH 120 (OverAll Height) • X 1 @ 16"x48" • Y 6 @ 12"x26"	EIC	9-60W A19 (540W)	12-60W A19 (720W)	1-26W PAR38 LED (26W)	3	PC	WA AG	ST CH TC SP	SQ
• W 72 • HT 58 • OAH 120 (OverAll Height) • X 1 @ 18"x58" • Y 6 @ 14"x29"	EID	12-60W A19 (720W)	12-60W A19 (720W)	1-26W PAR38 LED (26W)	3	PC	WA AG	ST CH TC SP	SQ

# SAMPLE CATALOG NUMBER

Model Number - Lamping Code - Finish - Mounting - Diffuser - Options

Scale


Abbreviation Key

Lamps

60W A19

Medium Base, 60W Max, Incandesent or LED

26W PAR38 Medium Base, 26W Max, LED LED

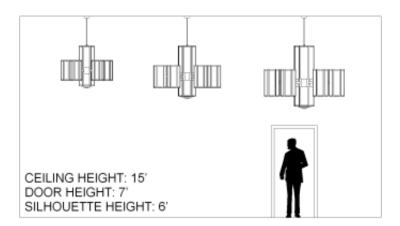

## PRODUCT FEATURES

- · Fabricated and welded metal housing
- Powder coated metallic finish
- UV stable, white acrylic diffuser (Standard)
- · Optional specialty diffuser materials available
- Energy efficient LED lamping
- High power factor electronic LED driver
- Wired for three circuit operation, Body Lamping, Down Lamping and Satellite
- Lamping
  Standard LED CCT is 3000 Kelvin contact us for alternate color temperature availability
- Standard LED CRI is 80 contact us for alternate CRI availability
   Incandescent lamping is Triac or ELV dimmable consult lamp and dimmer manufacturer for compatibility.
- Standard LED dimming is 0-10v
- Optional line voltage (Triac or ELV) LED dimming is available consult for compatibility
- Fixture is Chain or Stem hung (extra length may be added, specify OAH) (OAH -Over All Height - is the length from the ceiling to the bottom of the fixture.)
- Mounts to standard electrical junction box (by others), Box requires additional structural support (by others)
- For slopes greater than 35 degrees (from horizontal) order steep pitch adapter (Stem only)
- UL / cUL or ETL / cETL listed
- Contact Us for more lamping options.

## Finish Types

PC **Powder Coat** 

## **Diffuser Types**

Standard Acrylic Diffuser WA Premium Glass Diffuser AG

#### Mountings

ST Stem СН Chain

TC Triple Chain Spreader

SP Steep Pitch Canopy for Stem

#### Louvers

SQ Square Cell