


# **Oxford Series Pendant**






Model Number	Lamping Code	Body Lamping	Down Lamping		Finish	Diffuser	Mounting	Louver
• W 12 • HT 26 • OAH 72 (OverAll Height)	GBL	4-60W A19 (240W)	1-100W PAR38 (100W)		PC	WA AG	ST CH TC SM SP	SQ
OX1426L  • W 14  • HT 29  • OAH 96 (OverAll Height)	DVG	14,500lm LED(86W)	5,100lm LED (36W)	2	PC	WA AG	ST CH TC SM SP	SQ
	DFB	14,500lm LED(86W)	7,100lm LED (51W)	2	PC	WA AG	ST CH TC SM SP	SQ
	DTG	14,500lm LED(86W)	12,500lm LED (93W)	2	PC	WA AG	ST CH TC SM SP	SQ
	ЕОВ	23,100lm LED (146W)	7,100lm LED (51W)	2	PC	WA AG	ST CH TC SM SP	SQ
	DFJ	23,100lm LED (146W)	12,500lm LED (93W)	2	PC	WA AG	ST CH TC SM SP	SQ
	FIH	6-60W A19 (360W)	1-100W PAR38 (100W)	2	PC	WA AG	ST CH TC SM SP	SQ
• W 16 • HT 34 • OAH 96 (OverAll Height)	DFA	14,500lm LED(86W)	12,500lm LED (93W)	2	PC	WA AG	ST CH TC SM SP	SQ

	DLX	23,100lm LED (146W)	12,500lm LED (93W)	2	PC	WA AG	ST CH TC SM SP	SQ
	DCR	29,500lm LED (192W)	12,500lm LED (93W)	2	PC	WA AG	ST CH TC SM SP	SQ
	FII	6-60W A19 (360W)	1-100W PAR38 (100W)	2	PC	WA AG	ST CH TC SM SP	SQ
• W 18 • HT 40 • OAH 120 (OverAll Height)	FYJ	24,900lm LED (146W)	12,500lm LED (93W)	2	PC	WA AG	ST CH TC SM SP	SQ
	FIJ	9-60W A19 (540W)	1-100W PAR38 (100W)	2	PC	WA AG	ST CH TC SM SP	SQ
• W 22 • HT 46 • OAH 120 (OverAll Height)	GGO	31,000lm LED (185W)	12,500lm LED (93W)	2	PC	WA AG	ST CH TC SM SP	SQ
	FIL	9-60W A19 (540W)	1-100W PAR38 (100W)	2	PC	WA AG	ST CH TC SM SP	SQ

#### SAMPLE CATALOG NUMBER

#### Model Number - Lamping Code - Finish - Mounting - Diffuser - Options

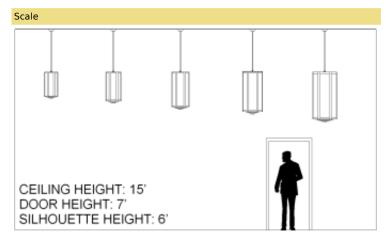

#### **PRODUCT FEATURES**

- Fabricated and welded metal housing
- · Powder coated metallic finish
- UV stable, white acrylic diffuser (Standard)
- · Optional specialty diffuser materials available
- Energy efficient LED lamping
- High power factor electronic LED driver
- · Wired for dual circuit operation, Body Lamping and Down Lamping
- Standard LED CCT is 3000 Kelvin contact us for alternate color temperature availability
- Standard LED CRI is 80 contact us for alternate CRI availability
- Incandescent lamping is Triac or ELV dimmable consult lamp and dimmer manufacturer for compatibility.
- Standard LED dimming is 0-10v
- Optional line voltage (Triac or ELV) LED dimming is available consult for
- Fixture is Chain or Stem hung (extra length may be added, specify OAH) (OAH -Over All Height - is the length from the ceiling to the bottom of the fixture.)
- Mounts to standard electrical junction box (by others), Box may require additional structural support (by others)
- For slopes greater than 35 degrees (from horizontal) order steep pitch adapter (Stem only)
- UL / cUL or ETL / cETL listed
- Contact Us for more lamping options.

#### Abbreviation Key

### Lamps

60W A19 Medium Base, 60W Max, Incandesent or LED 100W PAR38 Medium Base, 100W Max, Incandesent or LED

### Finish Types

PC **Powder Coat** 

## **Diffuser Types**

WA Standard Acrylic Diffuser ΑG Premium Glass Diffuser

### Mountings

ST

CH Chain TC Triple Chain Spreader SM Surface Mount Chain SP Steep Pitch Canopy for Stem

Stem

### Louvers

SQ Square Cell

### **Dimming Types**

0 D2 1 D1 D3 3 D16