


Pasadena Series Wall Sconce






Model Number	Lamping Body Lamping Code		Circuit	Finish	Diffuser	Mounting	Louver	Options
PA0816S	DYX	1,000lm LED (7W)	1	PC	WA	WM	BD	SIL BL
• W 8" • HT 16" • EXT 4"	DYY	1,800lm LED (14W)	1	PC	WA	WM	BD	SIL BL
	ASX	1-60W A19 (60W)	1	PC	WA	WM	BD	SIL BL
PA1020S	DYZ	1,800lm LED (14W)	1	PC	WA	WM	BD	SIL BL
• W 10" • HT 20" • EXT 5"	DZA	3,100lm LED (22W)	1	PC	WA	WM	BD	SIL BL
	ASZ	2-100W A21 (200W)	1	PC	WA	WM	BD	SIL BL
• W 12" • HT 24" • EXT 6"	DZB	6,300lm LED (40W)	1	PC	WA	WM	BD	SIL BL
	FEH	7,100lm LED (44W)	1	PC	WA	WM	BD	SIL BL
	ATC	3-100W A21 (300W)	1	PC	WA	WM	BD	SIL BL

SAMPLE CATALOG NUMBER

Model Number - Lamping Code - Finish - Mounting - Diffuser - Options

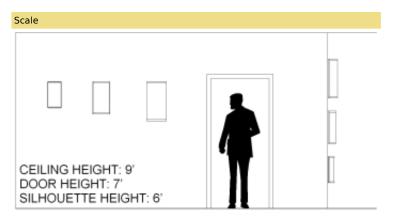

PRODUCT FEATURES

• Fabricated and welded metal housing

Abbreviation Key

Lamps

60W A19 Medium Base, 60W Max, Incandesent or LED 100W A21 Medium Base, 100W Max, Incandesent or LED

Finish Types

PC Powder Coat

Diffuser Types

WA Standard Acrylic Diffuser

Mountings

- Powder coated metallic finish
 UV stable, white acrylic cylinder diffuser (Standard)
 Optional specialty diffuser materials available
 Energy efficient LED lamping
 High power factor electronic LED driver
 Wired for single circuit operation, Body Lamping
 Standard LED CCT is 3000 Kelvin contact us for alternate color temperature availability availability
- Standard LED CRI is 80 contact us for alternate CRI availability
 Incandescent lamping is Triac or ELV dimmable consult lamp and dimmer
- manufacturer for compatibility.

 Standard LED dimming is 0-10v

 Optional line voltage (Triac or ELV) LED dimming is available consult for compatibility
- Mounts to standard electrical junction box (by others)
 UL / cUL or ETL / cETL listed
- Contact Us for more lamping options.

WM Wall Mount

Louvers

BD Bottom Perf Door

Dimming Types

0 D1

1 D2

Options

SIL Silhouette Symbol

BL**Bottom Lens** BD **Bottom Door**