



Plano Series Pendant

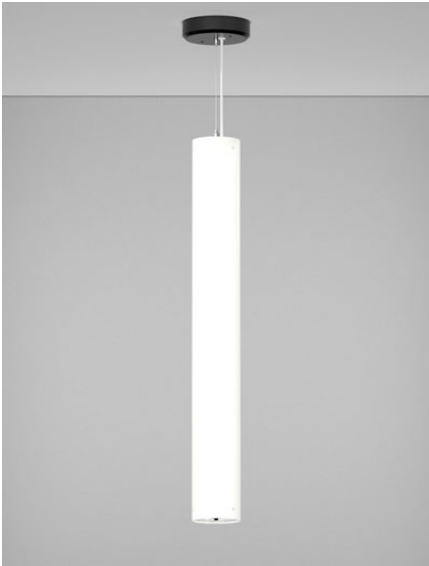

Model Number	Lamping Code	Body Lamping	Circuit	Finish	Diffuser	Mounting	Options
PL0624L	FLX	4,800lm LED (37W)	1	PC	WA	ST AC	BL
• W 6" • HT 24" • OAH 36" (OverAll Height)							
PL0636L	GKH	6,600lm LED (50W)	1	PC	WA	ST AC	BL
• W 6" • HT 36" • OAH 72" (OverAll Height)							
PL0648L	EZR	8,400lm LED (57W)	1	PC	WA	ST AC	BL
• W 06" • HT 48" • OAH 72" (OverAll Height)							

SAMPLE CATALOG NUMBER
Model Number - Lamping Code - Finish - Mounting - Diffuser - Options

Scale	Abbreviation Key
	Finish Types
	PC Powder Coat
	Diffuser Types
	WA Standard Acrylic Diffuser
	Mountings
	ST Stem
	AC Air Craft Cable

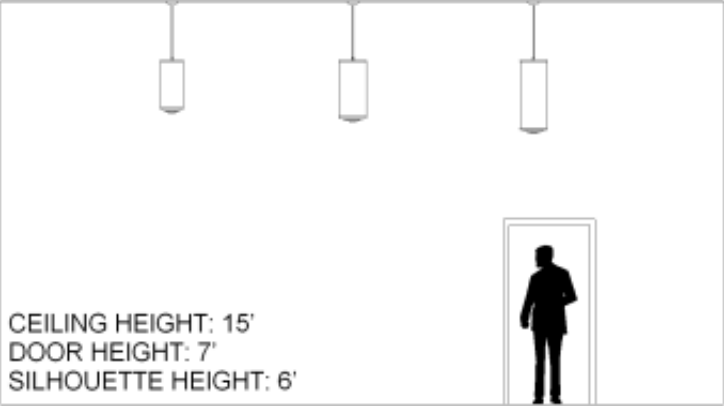

Dimming Types

0	D1
1	D2

Options

BL	Bottom Lens
----	-------------

PRODUCT FEATURES

- Fabricated and welded metal housing
- Powder coated metallic finish
- UV stable, white acrylic cylinder diffuser (Standard)
- Optional specialty diffuser materials available
- Energy efficient LED lamping
- High power factor electronic LED driver
- Standard LED CCT is 3000 Kelvin - contact us for alternate color temperature availability
- Standard LED CRI is 80 - contact us for alternate CRI availability
- Standard LED dimming is 0-10v
- Optional line voltage (Triac or ELV) LED dimming is available - consult for compatibility
- Fixture is Chain or Stem hung (extra length may be added, specify OAH) (OAH - Over All Height - is the length from the ceiling to the bottom of the fixture.)
- Mounts to standard electrical junction box (by others), Box may require additional structural support (by others)
- For slopes greater than 35 degrees (from horizontal) order steep pitch adapter (Stem only)
- UL / cUL or ETL / cETL listed
- Contact Us for more lamping options.