



Portland Series 3-Arm Cluster Pendant

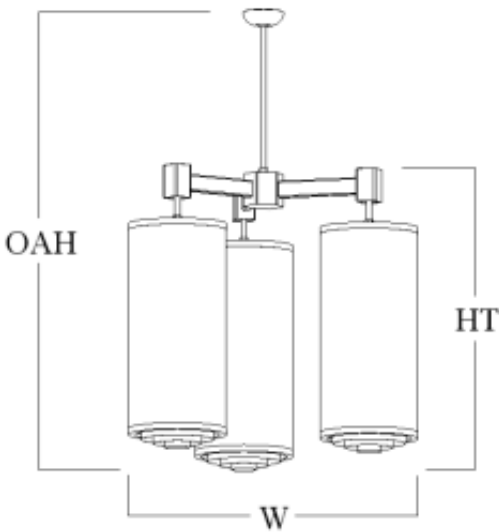

Model Number	Lamping Code	Body Lamping	Down Lamping	Circuit	Finish	Diffuser	Mounting	Louver	Options
PO2724U	GCH	12-60W A19 (720W)	3-100W A19 (300W)	2	PC	WA	ST SP	SQ	SIL LOGO
PO3026U	DQI	43,600lm LED (258W)	21,400lm LED (152W)	2	PC	WA	ST SP	SQ	SIL LOGO
	DQJ	69,300lm LED (436W)	37,600lm LED (278W)	2	PC	WA	ST SP	SQ	SIL LOGO
	GCI	18-60W A19 (1080W)	3-100W A21 (300W)	2	PC	WA	ST SP	SQ	SIL LOGO
PO3931U	EAT	43,600lm LED (258W)	37,600lm LED (278W)	2	PC	WA	ST SP	SQ	SIL LOGO
	DQD	69,300lm LED (436W)	37,600lm LED (278W)	2	PC	WA	ST SP	SQ	SIL LOGO
	DSG	88,700lm LED (575W)	37,600lm LED (278W)	2	PC	WA	ST SP	SQ	SIL LOGO
	GCI	18-60W A19 (1080W)	3-100W A21 (300W)	2	PC	WA	ST SP	SQ	SIL LOGO
PO3936U	GDX	74,800lm LED (436W)	37,600lm LED (278W)	2	PC	WA	ST SP	SQ	SIL LOGO

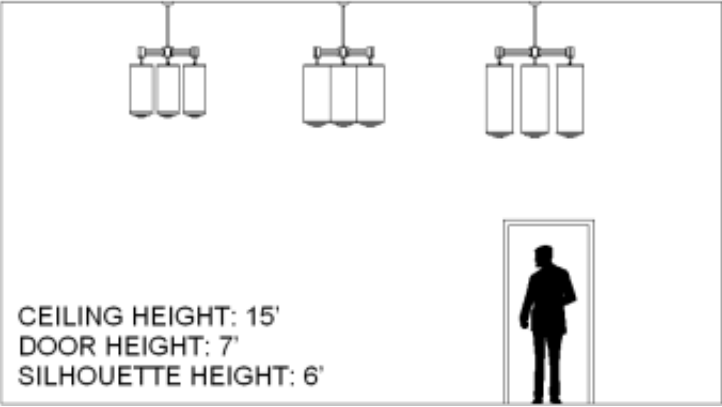

PRODUCT FEATURES

- Fabricated and welded metal housing
- Powder coated metallic finish
- UV stable, white acrylic cylinder diffuser (Standard)
- Optional specialty diffuser materials available
- Energy efficient LED lamping
- High power factor electronic LED driver
- Wired for dual circuit operation, Body Lamping and Down Lamping
- Standard LED CCT is 3000 Kelvin - contact us for alternate color temperature availability
- Standard LED CRI is 80 - contact us for alternate CRI availability
- Incandescent lamping is Triac or ELV dimmable - consult lamp and dimmer manufacturer for compatibility.
- Standard LED dimming is 0-10v
- Optional line voltage (Triac or ELV) LED dimming is available - consult for compatibility
- Fixture is Chain or Stem hung (extra length may be added, specify OAH) (OAH - Over All Height - is the length from the ceiling to the bottom of the fixture.)
- Mounts to standard electrical junction box (by others), Box requires additional structural support (by others)
- For slopes greater than 35 degrees (from horizontal) order steep pitch adapter (Stem only)
- UL / cUL or ETL / cETL listed
- Contact Us for more lamping options.

Lamps

60W A19	Medium Base, 60W Max, Incandescent or LED
100W A19	Medium Base, 100W Max, Incandescent or LED

Finish Types

PC	Powder Coat
----	-------------

Diffuser Types

WA	Standard Acrylic Diffuser
----	---------------------------

Mountings

ST	Stem
SP	Steep Pitch Canopy for Stem

Louvers

SQ	Square Cell
----	-------------

Dimming Types

0	D1
---	----

Options

SIL	Silhouette Symbol
LOGO	Custom Logo