


Portland Series 3-Arm Cluster Pendant

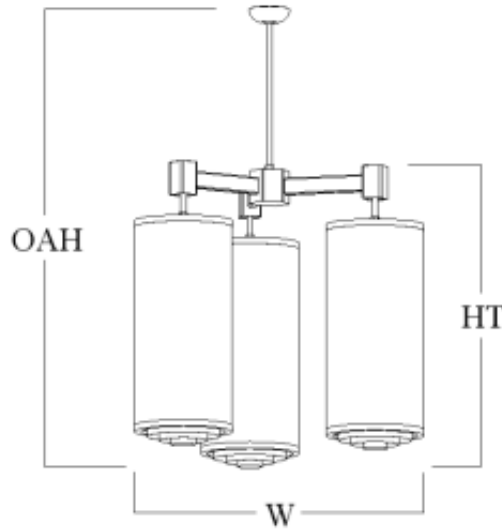

Model Number	Lamping Code	Body Lamping	Down Lamping	Circuit	Finish	Diffuser	Mounting	Louver	Options
PO2724U	GCH	12-60W A19 (720W)	3-100W A19 (300W)	2	PC	AD	ST SP	CR SQ	SIL LOGO
<ul style="list-style-type: none"> • W 27 • HT 32 • OAH 72 (OverAll Height) • Y 3 @ 10"x24" 									
PO3026U	DQI	43,600lm LED (258W)	21,400lm LED (139W)	2	PC	AD	ST SP	CR SQ	D1 LOGO SIL
	DQJ	69,300lm LED (436W)	37,600lm LED (255W)	2	PC	AD	ST SP	CR SQ	D1 LOGO SIL
	GCI	18-60W A19 (1080W)	3-100W A21 (300W)	2	PC	AD	ST SP	CR SQ	SIL LOGO
PO3931U	EAT	43,600lm LED (258W)	37,600lm LED (255W)	2	PC	AD	ST SP	CR SQ	D1 LOGO SIL
	DQD	69,300lm LED (436W)	37,600lm LED (255W)	2	PC	AD	ST SP	CR SQ	D1 LOGO SIL
	DSG	88,700lm LED (575W)	37,600lm LED (255W)	2	PC	AD	ST SP	CR SQ	D1 LOGO SIL
	GCJ	18-60W A19 (1080W)	3-100W A21 (300W)	2	PC	AD	ST SP	CR SQ	SIL LOGO
<ul style="list-style-type: none"> • W 51 • HT 39 • OAH 96 (OverAll Height) • X 3 @ 12"x31" 									

SAMPLE CATALOG NUMBER


Model Number - Lamping Code - Finish - Mounting - Diffuser - Options

Scale

Abbreviation Key

Lamps

60W A19	Medium Base, 60W Max, Incandesent or LED
100W A19	100W A19, medium base
100W A21	Medium Base, 100W Max, Incandesent or LED

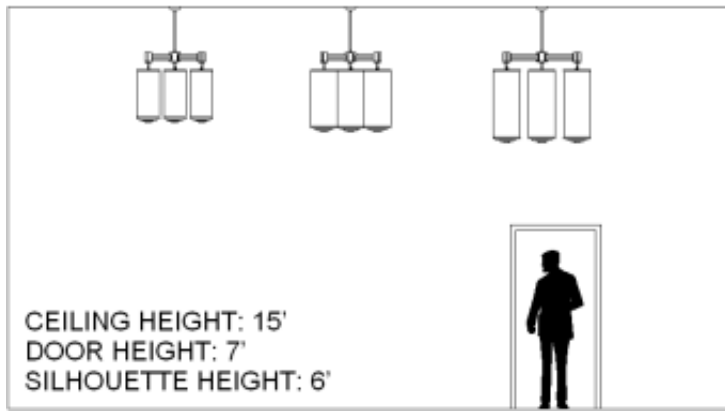

PRODUCT FEATURES

- Fabricated and welded metal housing
- Powder coated metallic finish
- UV stable, white acrylic diffuser (Standard)
- Optional specialty diffuser materials available
- Energy efficient LED or fluorescent lamping
- Wired for dual circuit operation (Body Lamping/Down Lamping)
- High power factor electronic ballast or LED driver
- Standard LED color temperature is 3000K with 80 CRI. Contact us for other color temperature or CRI options.
- Incandescent lamping is Triac or ELV dimmable - consult lamp and dimmer manufacturer for compatibility.
- Optional dimming ballast 120V or 277V (LED or fluorescent lamping)
- Fixture may be Chain or Stem hung (extra length may be added, specify OAH) (OAH - Over All Height - is the length from the ceiling to the bottom of the fixture.)
- Mounts to standard 4" octagonal electrical junction box (by others). Box requires additional structural support (by others)
- For slopes greater than 35 degrees (from horizontal) order steep pitch adapter (Stem only)
- UL / cUL or ETL / cETL listed
- Contact Us for more lamping options.

Finish Types

PC Powder Coat

Diffuser Types

AD Standard Acrylic Diffuser

Mountings

ST Stem

SP Steep Pitch Canopy for Stem

Louvers

CR Concentric Ring

SQ Square Cell

Dimming

D1 LED 0-10v dimming options include integral 120-277v dimming drivers

Options

SIL Silhouette Symbol

LOGO Custom Logo