



Portland Series Wall Sconce





SAMPLE CATALOG NUMBER
Model Number - Lamping Code - Finish - Hanging - Diffuser - Options

Model	Lamping								
Model Number	Lamping Code	Body Lamping	Voltage	Circuit	Finish	Diffuser	Options	Dimensions	
PO0816S	DYW DYK AHS	1,000lm LED (6W) 2,300lm LED (15W) 1-60W-A19 (60W)	120/277 120/277 120	1 1 1	PC	AC	BD BL CC D10 E MC TC	W HT EXT	8" 16" 4"
PO1020S	DYL DYM AHU	2,300lm LED (15W) 3,400lm LED (27W) 2-100W-A21 (200W)	120/277 120/277 120	1 1 1	PC	AC	BD BL CC D10 E MC TC	W HT EXT	10" 20" 5"
PO1224S	DYO DYN AHX	6,300lm LED (42W) 7,100lm LED (48W) 3-100W-A21 (300W)	120/277 120/277 120	1 1 1	PC	AC	BD BL CC D10 E MC TC	W HT EXT	12" 24" 6"

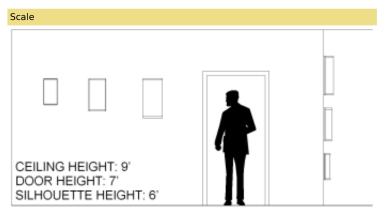

Abbreviation Key

Dimensions

W Width
HT Height
EXT Extension

Lamp Descriptions

60W-A19 Medium Base, 60W Max, Incandesent or LED 100W-A21 Medium Base, 100W Max, Incandesent or LED

LED 3000 Kelvin Warm White LED

PRODUCT FEATURES

- Fabricated and welded metal housing
 Powder coated metallic finish
 UV stable, white acrylic diffuser (Standard)
 Optional specialty diffuser materials available
 Energy efficient LED or fluorescent lamping
 Wired for single circuit porartice (Body Lampi
- Wired for single circuit operation (Body Lamping)
- Wired for single circuit operation (Body Lamping)
 High power factor electronic ballast or LED driver
 Incandescent lamping is Triac or ELV dimmable consult lamp and dimmer manufacturer for compatability.
 Optional dimming ballast 120V or 277V (LED or fluorescent lamping)
 Mounts to standard electrical junction box (by others)
 LED Battery Back-Up Available

- UL / cUL or ETL / cETL listed
- Contact Us for more lamping options.

Finish Types

PC **Powder Coat**

Diffuser Types

AC White Acrylic Cylinder

Options

D10	0-10V low voltage control dimming
E	Exterior Fixture Modification Available For Some

Models-Contact Manufacturer BL **Bottom Lens**

BD Bottom Door МС Modern Cross TC Triple Cross CC Celtic Cross