## **Phoenix Series Ceiling Mount**






Model Number	Lamping Code	Body Lamping	Circuit	Finish	Diffuser	Mounting	Louver	Options
<b>PX1008C</b> • W 10" • HT 11"	AST	2-100W A21 (200W)	1	PC	WA	CC	SQ	CUT LOGO
PX1209C	GJL	5,400lm LED (33W)	1	PC	WA	СС	SQ	CUT LOGO
• W 12" • HT 12"	ASV	3-100W A21 (300W)	1	PC	WA	СС	SQ	CUT LOGO

Abbreviation Key

## SAMPLE CATALOG NUMBER

Model Number - Lamping Code - Finish - Mounting - Diffuser - Options

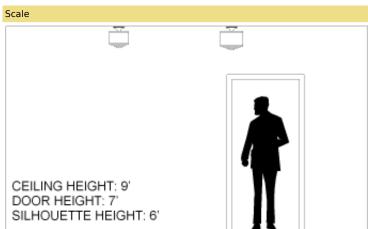

Lamps		
100W A21	.00W A21 Medium Base, 100W Max, Incandesent or LED	
Finish Types		
PC	Powder Coat	
Diffuser Types		
WA	Standard Acrylic Diffuser	
Mountings		
СС	Ceiling Canopy	
Louvers		
SQ	Square Cell	
Dimming Types		
0	D1	
1	D2	

## PRODUCT FEATURES

- Fabricated and welded metal housing
- Powder coated metallic finish
- UV stable, white acrylic cylinder diffuser (Standard)
- Optional specialty diffuser materials available
- Energy efficient LED lamping
- High power factor electronic LED driver • Wired for single circuit operation, Body Lamping
- Standard LED CCT is 3000 Kelvin contact us for alternate color temperature availability
- Standard LED CRI is 80 contact us for alternate CRI availability
- Incandescent lamping is Triac or ELV dimmable consult lamp and dimmer

manufacturer for compatibility.
Standard LED dimming is 0-10v
Optional line voltage (Triac or ELV) LED dimming is available - consult for compatibility
Mounts to standard electrical junction box (by others)
UL / cUL or ETL / cETL listed
Contact Us for more lamping options.

## Options

CUT Cut-Out Symbol LOGO

Custom Logo