


Phoenix Series Short Pendant

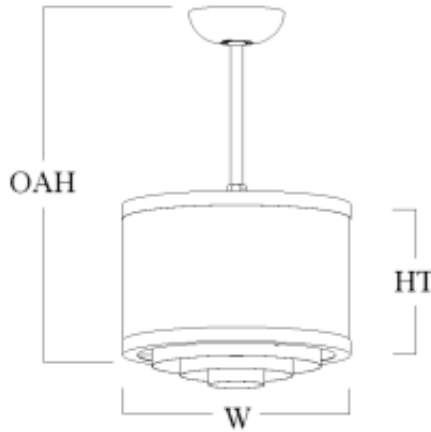

Model Number	Lamping Code	Body Lamping	Circuit	Finish	Diffuser	Mounting	Louver	Options
PX1008P	ASO	2-100W A21 (200W)	1	PC	AD	ST CH SM SP	CR SQ	CUT LOGO
<ul style="list-style-type: none"> • W 10" • HT 8" • OAH 48" (OverAll Height) 								
PX1209P	ASQ	3-100W A21 (300W)	1	PC	AD	ST CH SM SP	CR SQ	CUT LOGO
<ul style="list-style-type: none"> • W 12" • HT 9" • OAH 48" (OverAll Height) 								

SAMPLE CATALOG NUMBER

Model Number - Lamping Code - Finish - Mounting - Diffuser - Options

PRODUCT FEATURES

- Fabricated and welded metal housing
- Powder coated metallic finish
- UV stable, white acrylic diffuser (Standard)
- Optional specialty diffuser materials available
- Energy efficient LED or fluorescent lamping
- Wired for single circuit operation (Body Lamping)
- High power factor electronic ballast or LED driver
- Incandescent lamping is Triac or ELV dimmable - consult lamp and dimmer manufacturer for compatibility.
- Optional dimming ballast 120V or 277V (LED or fluorescent lamping)
- Fixture may be Chain or Stem hung (extra length may be added, specify OAH) (OAH - Over All Height - is the length from the ceiling to the bottom of the fixture.)
- Mounts to standard 4" octagonal electrical junction box (by others)
- For slopes greater than 35 degrees (from horizontal) order steep pitch adapter (Stem only)
- UL / cUL or ETL / cETL listed
- Contact Us for more lamping options.

Abbreviation Key

Dimensions

W	Width
HT	Height
OAH	OverAll Height

Lamps

100W A21	Medium Base, 100W Max, Incandesent or LED
----------	---

Finish Types

PC	Powder Coat
----	-------------

Diffuser Types

AD	Standard Acrylic Diffuser
----	---------------------------

Mountings

ST	Stem
CH	Chain
SM	Surface Mount Chain
SP	Steep Pitch Canopy for Stem

Louvers

CR	Concentric Ring
SQ	Square Cell

Options

CUT	Cut-Out Symbol
LOGO	Custom Logo