


## Phoenix Series Short Pendant

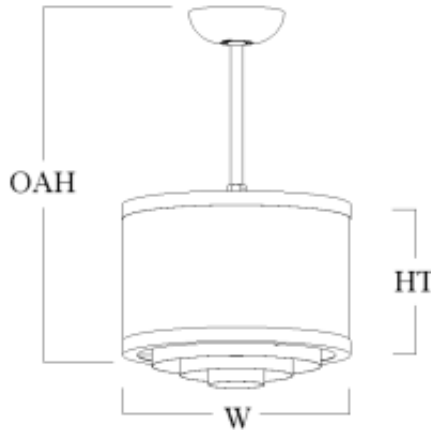

Model Number	Lamping Code	Body Lamping	Circuit	Finish	Diffuser	Mounting	Louver	Options
<b>PX1008P</b>	ASO	2-100W A21 (200W)	1	PC	AD	ST CH SM SP	CR SQ	CUT LOGO
<ul style="list-style-type: none"> <li>• W 10"</li> <li>• HT 8"</li> <li>• OAH 48" (OverAll Height)</li> </ul>								
<b>PX1209P</b>	ASQ	3-100W A21 (300W)	1	PC	AD	ST CH SM SP	CR SQ	CUT LOGO
<ul style="list-style-type: none"> <li>• W 12"</li> <li>• HT 9"</li> <li>• OAH 48" (OverAll Height)</li> </ul>								

### SAMPLE CATALOG NUMBER

**Model Number - Lamping Code - Finish - Mounting - Diffuser - Options**

### PRODUCT FEATURES

- Fabricated and welded metal housing
- Powder coated metallic finish
- UV stable, white acrylic diffuser (Standard)
- Optional specialty diffuser materials available
- Energy efficient LED or fluorescent lamping
- Wired for single circuit operation (Body Lamping)
- High power factor electronic ballast or LED driver
- Incandescent lamping is Triac or ELV dimmable - consult lamp and dimmer manufacturer for compatability.
- Optional dimming ballast 120V or 277V (LED or fluorescent lamping)
- Fixture may be Chain or Stem hung (extra length may be added, specify OAH) (OAH - Over All Height - is the length from the ceiling to the bottom of the fixture.)
- Mounts to standard 4" octagonal electrical junction box (by others)
- For slopes greater than 35 degrees (from horizontal) order steep pitch adapter (Stem only)
- UL / cUL or ETL / cETL listed
- Contact Us for more lamping options.

### Abbreviation Key

#### Dimensions

W	Width
HT	Height
OAH	OverAll Height

#### Lamps

100W A21	Medium Base, 100W Max, Incandesent or LED
----------	---

#### Finish Types

PC	Powder Coat
----	-------------

#### Diffuser Types

AD	Standard Acrylic Diffuser
----	---------------------------

#### Mountings

ST	Stem
CH	Chain
SM	Surface Mount Chain
SP	Steep Pitch Canopy for Stem

#### Louvers

CR	Concentric Ring
SQ	Square Cell

#### Options

CUT	Cut-Out Symbol
LOGO	Custom Logo