
Phoenix Series Short Pendant






Model Number	Lamping Code	Body Lamping	Circuit	Finish	Diffuser	Mounting	Louver	Options
 PX1008P W 10" HT 8" OAH 48" (OverAll Height) 	ASO	2-100W A21 (200W)	1	PC	WA	ST CH SM SP	SQ	CUT LOGO

PX1209P • W 12" • HT 9" • OAH 48" (OverAll Height)	GGR	5,400lm LED (33W)	1	PC	WA	ST CH SM SP	SQ	CUT LOGO
	ASQ	3-100W A21 (300W)	1	PC	WA	ST CH SM SP	SQ	CUT LOGO

SAMPLE CATALOG NUMBER

Model Number - Lamping Code - Finish - Mounting - Diffuser - Options

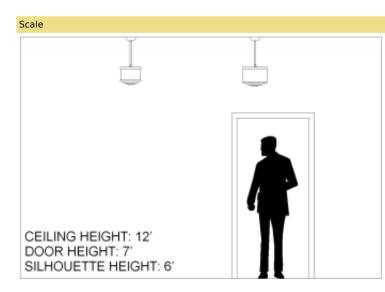

Abbreviation Key				
Lamps				
100W A21	Medium Base, 100W Max, Incandesent or LED			
Finish Types				
PC	Powder Coat			
Diffuser Types				
WA	Standard Acrylic Diffuser			
Mountings				
ST	Stem			
СН	Chain			
SM	Surface Mount Chain			
SP	Steep Pitch Canopy for Stem			

PRODUCT FEATURES

· Fabricated and welded metal housing

· Powder coated metallic finish

- UV stable, white acrylic cylinder diffuser (Standard)
 Optional specialty diffuser materials available
 Energy efficient LED lamping

- High power factor electronic LED driver
- Wired for dual circuit operation, Body Lamping and Down Lamping
- Standard LED CCT is 3000 Kelvin contact us for alternate color temperature availability
- Standard LED CRI is 80 contact us for alternate CRI availability
- Incandescent lamping is Triac or ELV dimmable consult lamp and dimmer manufacturer for compatibility.
- Standard LED dimming is 0-10v
- Optional line voltage (Triac or ELV) LED dimming is available consult for compatibility
- Fixture is Chain or Stem hung (extra length may be added, specify OAH) (OAH -Over All Height - is the length from the ceiling to the bottom of the fixture.)
- · Mounts to standard electrical junction box (by others), Box may require additional structural support (by others)
- For slopes greater than 35 degrees (from horizontal) order steep pitch adapter (Stem only)
- UL / cUL or ETL / cETL listed
- Contact Us for more lamping options.

Louvers		
SQ	Square Cell	
Dimming Ty	Des	
0	D1	
1	D2	
Options		
CUT	Cut-Out Symbol	
LOGO	Custom Logo	