


Phoenix Series Wall Sconce



Model Number	Lamping Code	Body Lamping	Circuit	Finish	Diffuser	Mounting	Louver	Options
PX0816S • W 8" • HT 16" • EXT 4"	DYX	1,000lm LED (7W)	1	PC	WA	WM	BD	CUT LOGO BL
	DYY	1,800lm LED (14W)	1	PC	WA	WM	BD	CUT LOGO BL
	ASX	1-60W A19 (60W)	1	PC	WA	WM	BD	CUT LOGO BL
PX1020S • W 10" • HT 20" • EXT 5"	DYZ	1,800lm LED (14W)	1	PC	WA	WM	BD	CUT LOGO BL
	DZA	3,100lm LED (22W)	1	PC	WA	WM	BD	CUT LOGO BL
	ASZ	2-100W A21 (200W)	1	PC	WA	WM	BD	CUT LOGO BL
PX1224S • W 12" • HT 24" • EXT 6"	DZB	6,300lm LED (40W)	1	PC	WA	WM	BD	CUT LOGO BL
	FEH	7,100lm LED (44W)	1	PC	WA	WM	BD	CUT LOGO BL
	ATC	3-100W A21 (300W)	1	PC	WA	WM	BD	CUT LOGO BL

SAMPLE CATALOG NUMBER
Model Number - Lamping Code - Finish - Mounting - Diffuser - Options

Scale	Abbreviation Key
	Lamps
	60W A19 Medium Base, 60W Max, Incandesent or LED
	100W A21 Medium Base, 100W Max, Incandesent or LED
	Finish Types
	PC Powder Coat

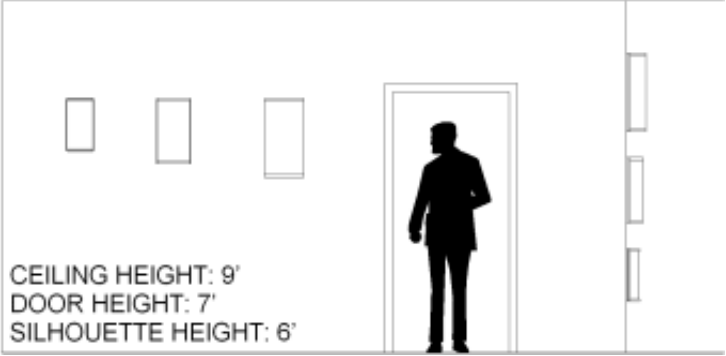

PRODUCT FEATURES

- Fabricated and welded metal housing
- Powder coated metallic finish
- UV stable, white acrylic cylinder diffuser (Standard)
- Optional specialty diffuser materials available
- Energy efficient LED lamping
- High power factor electronic LED driver
- Wired for single circuit operation, Body Lamping
- Standard LED CCT is 3000 Kelvin - contact us for alternate color temperature availability
- Standard LED CRI is 80 - contact us for alternate CRI availability
- Incandescent lamping is Triac or ELV dimmable - consult lamp and dimmer manufacturer for compatibility.
- Standard LED dimming is 0-10v
- Optional line voltage (Triac or ELV) LED dimming is available - consult for compatibility
- Mounts to standard electrical junction box (by others)
- UL / cUL or ETL / cETL listed
- Contact Us for more lamping options.

Diffuser Types	
WA	Standard Acrylic Diffuser
Mountings	
WM	Wall Mount
Louvers	
BD	Bottom Perf Door
Dimming Types	
0	D1
1	D2
Options	
CUT	Cut-Out Symbol
LOGO	Custom Logo
BL	Bottom Lens
BD	Bottom Door