


Randolph Series 3-Arm Cluster Pendant

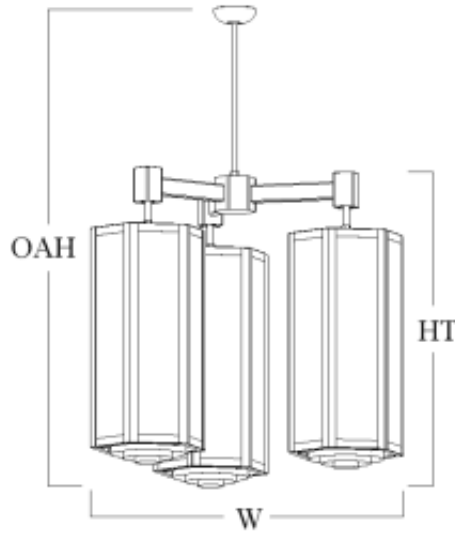

Model Number	Lamping Code	Body Lamping	Down Lamping	Circuit	Finish	Diffuser	Mounting	Louver
RD2722U	AQA	9-100W A21 (900W)	3-300W R40 (900W)	2	PC	AD AG	ST SP	CR SQ
<ul style="list-style-type: none"> • W 38" • HT 32" • OAH 8" (OverAll Height) • X 3 @ 12"x25" 								
RD3026U	DRI	44,100lm LED (262W)	21,000lm LED (139W)	2	PC	AD AG	ST SP	CR SQ
<ul style="list-style-type: none"> • W 42" • HT 37" • OAH 10' (OverAll Height) • X 3 @ 14"x29" 								
	DRJ	44,100lm LED (262W)	36,000lm LED (298W)	2	PC	AD AG	ST SP	CR SQ
	DRK	70,100lm LED (436W)	36,000lm LED (298W)	2	PC	AD AG	ST SP	CR SQ
	DJJ	18-100W A21 (1800W)	3-300W R40 (900W)	2	PC	AD AG	ST SP	CR SQ
RD3931U	DRL	44,100lm LED (262W)	36,000lm LED (298W)	2	PC	AD AG	ST SP	CR SQ
<ul style="list-style-type: none"> • W 53" • HT 42" • OAH 10' (OverAll Height) • X 3 @ 16"x35" 								
	DRM	70,100lm LED (436W)	36,000lm LED (298W)	2	PC	AD AG	ST SP	CR SQ
	DRN	89,500lm LED (581W)	36,000lm LED (298W)	2	PC	AD AG	ST SP	CR SQ
	DJK	18-100W A21 (1800W)	3-300W R40 (900W)	2	PC	AD AG	ST SP	CR SQ
RD4836U	DRO	70,700lm LED (393W)	36,000lm LED (298W)	2	PC	AD AG	ST SP	CR SQ

- W 64"
- HT 48"
- OAH 10'
(OverAll Height)
- X 3 @ 18"x40"

DRP	112,400lm LED (654W)	36,000lm LED (298W)	2	PC	AD AG	ST SP	CR SQ
DJL	27-100W A21 (2700W)	3-300W R40 (900W)	3	PC	AD AG	ST SP	CR SQ

SAMPLE CATALOG NUMBER

Model Number - Lamping Code - Finish - Mounting - Diffuser - Options

PRODUCT FEATURES

- Fabricated and welded metal housing
- Powder coated metallic finish
- UV stable, white acrylic diffuser (Standard)
- Optional specialty diffuser materials available
- Energy efficient LED or fluorescent lamping
- Wired for dual circuit operation (Body Lamping/Down Lamping)
- High power factor electronic ballast or LED driver
- Incandescent lamping is Triac or ELV dimmable - consult lamp and dimmer manufacturer for compatability.
- Optional dimming ballast 120V or 277V (LED or fluorescent lamping)
- Fixture may be Chain or Stem hung (extra length may be added, specify OAH) (OAH - Over All Height - is the length from the ceiling to the bottom of the fixture.)
- Mounts to standard 4" octagonal electrical junction box (by others), Box requires additional structural support (by others)
- For slopes greater than 35 degrees (from horizontal) order steep pitch adapter (Stem only)
- UL / cUL or ETL / cETL listed
- Contact Us for more lamping options.

Abbreviation Key

Dimensions

W	Width
HT	Height
OAH	OverAll Height
X	X-Dimension

Lamps

100W A21	Medium Base, 100W Max, Incandesent or LED
300W R40	300W R40, medium base

Finish Types

PC	Powder Coat
----	-------------

Diffuser Types

AD	Standard Acrylic Diffuser
AG	Premium Glass Diffuser

Mountings

ST	Stem
SP	Steep Pitch Canopy for Stem

Louvers

CR	Concentric Ring
SQ	Square Cell

Options

D1	LED 0-10V low voltage control dimming
----	---------------------------------------