


Roselle Series Ceiling Mount

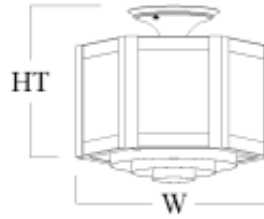


Model Number	Lamping Code	Body Lamping	Circuit	Finish	Diffuser	Mounting	Louver
RE1207C	ABT	2-100W A21 (200W)	1	PC	AD AG	CC FM	CR SQ
<ul style="list-style-type: none"> • W 12" • HT 10" 							
RE1408C	DTR	2,600lm LED (22W)	1	PC	AD AG	CC FM	CR SQ
<ul style="list-style-type: none"> • W 14" • HT 11" 							
	ABV	3-100W A21 (300W)	1	PC	AD AG	CC FM	CR SQ
RE1609C	DTS	3,800lm LED (31W)	1	PC	AD AG	CC FM	CR SQ
<ul style="list-style-type: none"> • W 16" • HT 12" 							
	ABX	3-100W A21 (300W)	1	PC	AD AG	CC FM	CR SQ
RE1811C	DOQ	3,800lm LED (31W)	1	PC	AD AG	CC FM	CR SQ
<ul style="list-style-type: none"> • W 18" • HT 14" 							
	ABZ	3-100W A21 (300W)	1	PC	AD AG	CC FM	CR SQ
RE2206C	DUL	6-60W A19 (360W)	1	PC	AD AG	CC FM	CR SQ
<ul style="list-style-type: none"> • W 22" • HT 7" 							

SAMPLE CATALOG NUMBER

Model Number - Lamping Code - Finish - Mounting - Diffuser - Options

Scale

Abbreviation Key

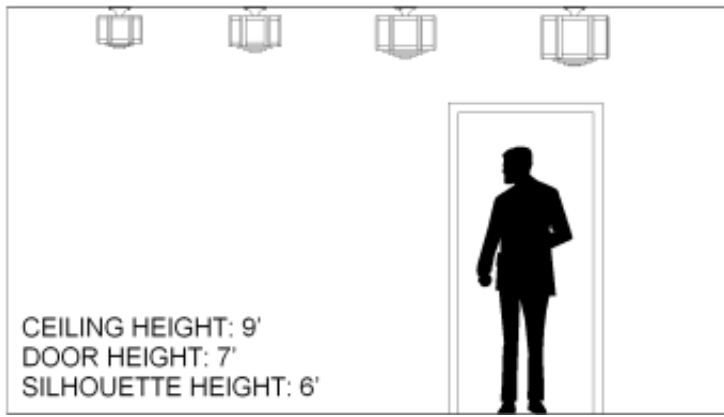

Pendant fixtures may be chain or stem hung.

O. A. Ht. is the standard hanging allowance from the ceiling to the bottom of the fixture.

Extra chain or stem may be added.

Dimensions

W	Width
HT	Height

Lamps

100W A21	Medium Base, 100W Max, Incandescent or LED
60W A19	Medium Base, 60W Max, Incandescent or LED

Finish Types

PC	Powder Coat
----	-------------

Diffuser Types

AD	Standard Acrylic Diffuser
AG	Premium Glass Diffuser

Mountings

CC	Ceiling Canopy
FM	Flush Mount

Louvers

CR	Concentric Ring
SQ	Square Cell

Options

D1	LED 0-10V low voltage control dimming
----	---------------------------------------