


Raleigh Series 3-Tier Large Pendant

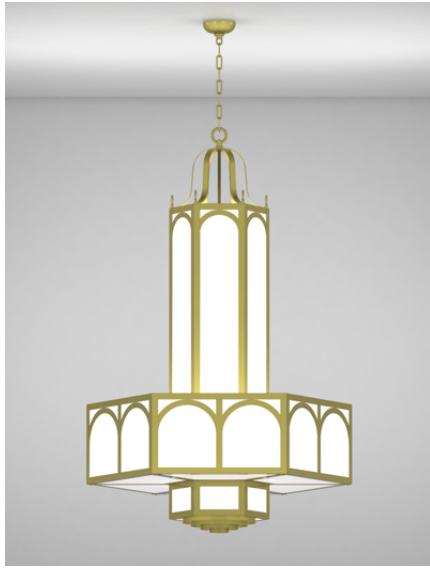

Model Number	Lamping Code	Body Lamping	Gallery Lamping	Down Lamping	Circuit	Finish	Diffuser	Mounting	Louver	Options
RL3036H • W 30" • HT 43" • OAH 72" (OverAll Height)	ADC	3-100W A21 (300W)	6-150W A21 (900W)	1-300W R40 (300W)	3	PC	AD AG	ST CH SP	CR SQ	SIL
	DVO	15,300lm LED (91W)	32,700lm LED (200W)	7,000lm LED (47W)	2	PC	AD AG	ST CH SP	CR SQ	D1 SIL
RL3642H • W 36" • HT 48" • OAH 96" (OverAll Height)	DIO	6-100W A21 (600W)	6-200W A21 (1200W)	1-300W R40 (300W)	3	PC	AD AG	ST CH SP	CR SQ	SIL
	EAU	15,300lm LED (91W)	32,700lm LED (200W)	12,000lm LED (100W)	2	PC	AD AG	ST CH SP	CR SQ	D1 SIL
RL4249H • W 42" • HT 57" • OAH 120" (OverAll Height)	DIP	6-100W A21 (600W)	6-300W PS25 (1800W)	1-300W R40 (300W)	4	PC	AD AG	ST CH SP	CR SQ	SIL
	DVQ	28,100lm LED (145W)	37,800lm LED (236W)	12,000lm LED (100W)	2	PC	AD AG	ST CH SP	CR SQ	D1 SIL
RL5460H • W 54" • HT 60" • OAH 120" (OverAll Height)	EIN	6-100W A21 (600W)	6-300W PS25 (1800W)	1-300W R40 (300W)	3	PC	AD AG	ST CH SP	CR SQ	SIL

SAMPLE CATALOG NUMBER


Model Number - Lamping Code - Finish - Mounting - Diffuser - Options

Scale

Abbreviation Key

Dimensions

W	Width
HT	Height
OAH	OverAll Height

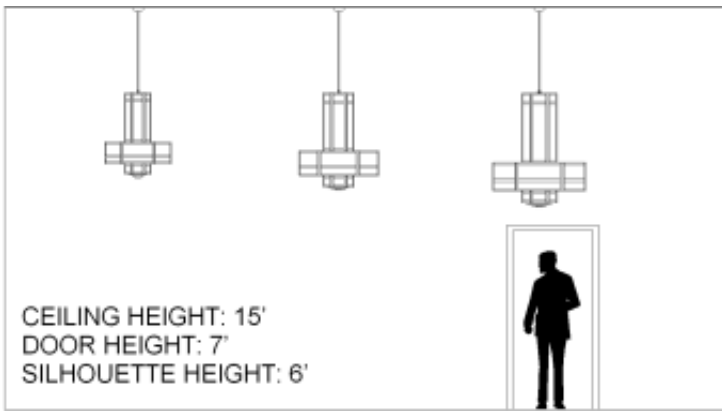

PRODUCT FEATURES

- Fabricated and welded metal housing
- Powder coated metallic finish
- UV stable, white acrylic diffuser (Standard)
- Optional specialty diffuser materials available
- Energy efficient LED or fluorescent lamping
- Wired for three circuit operation (Body Lamping/Gallery Lamping/Down Lamping)
- High power factor electronic ballast or LED driver
- Incandescent lamping is Triac or ELV dimmable - consult lamp and dimmer manufacturer for compatibility.
- Optional dimming ballast 120V or 277V (LED or fluorescent lamping)
- Fixture may be Chain or Stem hung (extra length may be added, specify OAH) (OAH - Over All Height - is the length from the ceiling to the bottom of the fixture.)
- Mounts to standard 4" octagonal electrical junction box (by others), Box requires additional structural support (by others)
- For slopes greater than 35 degrees (from horizontal) order steep pitch adapter (Stem only)
- UL / cUL or ETL / cETL listed
- Contact Us for more lamping options.

Lamps

100W A21	Medium Base, 100W Max, Incandescent or LED
150W A21	150W A21, medium base
300W R40	300W R40, medium base
200W A21	200W A21, medium base
300W PS25	300W PS25, medium base

Finish Types

PC	Powder Coat
----	-------------

Diffuser Types

AD	Standard Acrylic Diffuser
AG	Premium Glass Diffuser

Mountings

ST	Stem
CH	Chain
SP	Steep Pitch Canopy for Stem

Louvers

CR	Concentric Ring
SQ	Square Cell

Options

SIL	Silhouette Symbol
D1	LED 0-10V low voltage control dimming