

# **Raleigh Series 3-Tier Large Pendant**




(OverAll Height)



Model Number	Lamping Code	Body Lamping	Gallery Lamping	Down Lamping	Circuit	Finish	Diffuser	Mounting	Louver	Options
RL3038H  • W 30  • HT 45  • OAH 72 (OverAll Height)	GLG	4-60W A19 (240W)	6-60W A19 (360W)	1-100W R40/Par38 (100W)	2	PC	WA AG	ST CH SP	SQ	SIL LOGO
• W 36 • HT 48 • OAH 96 (OverAll Height)	DVO	15,300lm LED (87W)	32,600lm LED (216W)	7,100lm LED (51W)	2	PC	WA AG	ST CH SP	SQ	SIL LOGO
	FWD	6-100W A21 (600W)	6-100W A21 (600W)	1-100W R40/Par38 (100W)	3	PC	WA AG	ST CH SP	SQ	SIL LOGO
• W 42 • HT 57 • OAH 120 (OverAll Height)	EAU	15,300lm LED (87W)	32,600lm LED (216W)	12,500lm LED (93W)	2	PC	WA AG	ST CH SP	SQ	SIL LOGO
	FWC	6-100W A21 (600W)	12-100W A21 (1200W)	1-100W R40/Par38 (100W)	3	PC	WA AG	ST CH SP	SQ	SIL LOGO
RL4856H  • W 48  • HT 66  • OAH 120 (OverAll Height)	ESP	25,700lm LED (159W)	32,600lm LED (216W)	12,500lm LED (93W)	2	PC	WA AG	ST CH SP	SQ	SIL LOGO
	FWM	6-100W A21 (600W)	12-100W A21 (1200W)	1-100W R40/Par38 (100W)	3	PC	WA AG	ST CH SP	SQ	SIL LOGO
RL5460H  • W 54"  • HT 60"  • OAH 120"  (OverAll Height)	FZD	27,800lm LED (132W)	37,600lm LED (260W)	12,500lm LED (93W)	2	PC	WA AG	ST CH SP	SQ	SIL LOGO
	FWE	6-100W A21 (600W)	12-100W A21 (1200W)	1-100W R40/Par38 (100W)	3	PC	WA AG	ST CH SP	SQ	SIL LOGO
RL6072H  • W 60"  • HT 72"  • OAH 120"	GLR	27,800lm LED (146W)	37,600lm LED (260W)	12,500lm LED (93W)	2	PC	WA AG	ST CH SP	SQ	SIL LOGO

### SAMPLE CATALOG NUMBER

### Model Number - Lamping Code - Finish - Mounting - Diffuser - Options

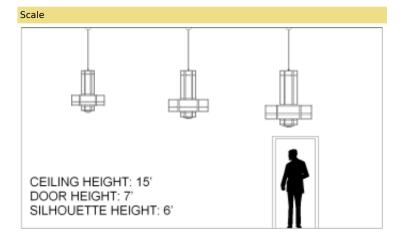

### PRODUCT FEATURES

- · Fabricated and welded metal housing
- · Powder coated metallic finish
- UV stable, white acrylic diffuser (Standard)
- Optional specialty diffuser materials available
- Energy efficient LED lamping
- High power factor electronic LED driver
- Wired for three circuit operation, Body Lamping, Gallery Lamping and Down Lamping
- Standard LED CCT is 3000 Kelvin contact us for alternate color temperature availability
- Standard LED CRI is 80 contact us for alternate CRI availability
- Incandescent lamping is Triac or ELV dimmable consult lamp and dimmer manufacturer for compatibility.
- Standard LED dimming is 0-10v
- Optional line voltage (Triac or ELV) LED dimming is available consult for compatibility
- Fixture is Chain or Stem hung (extra length may be added, specify OAH) (OAH -Over All Height - is the length from the ceiling to the bottom of the fixture.)
- Mounts to standard electrical junction box (by others), Box requires additional structural support (by others)
- For slopes greater than 35 degrees (from horizontal) order steep pitch adapter (Stem only)
- UL / cUL or ETL / cETL listed
- Contact Us for more lamping options.

## Abbreviation Key

Lamps

60W A19 Medium Base, 60W Max, Incandesent or LED

100W Medium Base, 100W Max, Incandesent or LED

R40/Par38

Finish Types

PC Powder Coat

**Diffuser Types** 

WA Standard Acrylic Diffuser
AG Premium Glass Diffuser

Mountings

ST Stem
CH Chain

SP Steep Pitch Canopy for Stem

Louvers

SQ Square Cell

**Dimming Types** 

0 D1 1 D3

Options

SIL Silhouette Symbol LOGO Custom Logo